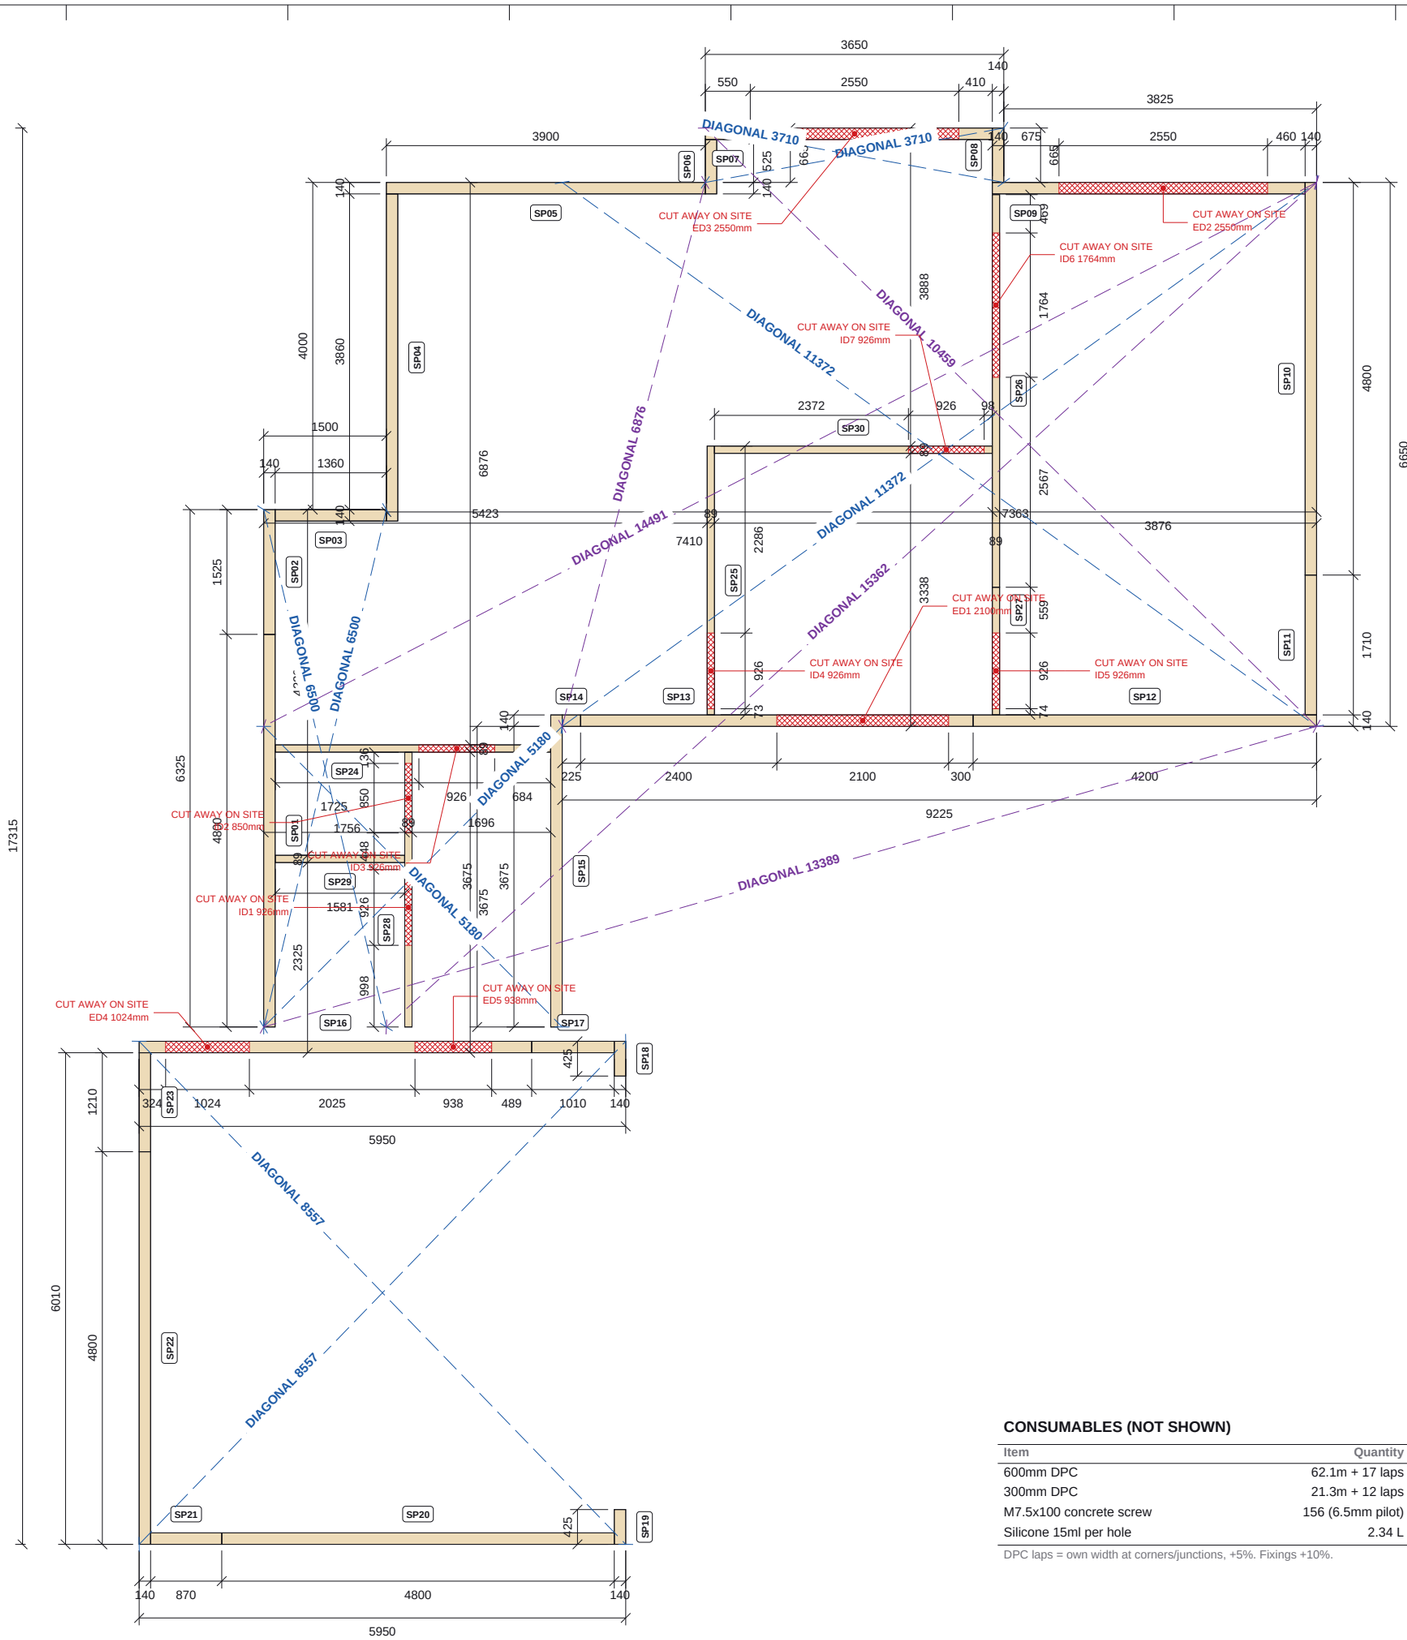


GROUND FLOOR SOLE PLATE SETTING OUT PLAN

Scale 1:75 @ A3 | Hatched red = sole plate cut away on site at door openings

SOLE PLATE SCHEDULE

SOLE PLATES

Section	Pieces	Run m	4.8m lengths
38x140 C16	23	62.1	15
38x89 C16	7	21.3	7

Cut-optimised 4.8m stock, 3mm kerf, +5%.

SOLE PLATE CUT LIST

Mark	Section	Length	Cut-away
SP01	38x140	4800	
SP10	38x140	4800	
SP13	38x140	4800	ED1
SP16	38x140	4800	ED4, ED5
SP20	38x140	4800	
SP22	38x140	4800	
SP12	38x140	4200	
SP04	38x140	4000	
SP05	38x140	3900	
SP09	38x140	3825	ED2
SP15	38x140	3815	
SP07	38x140	3510	ED3
SP11	38x140	1710	
SP02	38x140	1525	
SP03	38x140	1360	

Mark	Section	Length	Cut-away
SP23	38x140	1210	
SP17	38x140	1010	
SP21	38x140	870	
SP06	38x140	665	
SP08	38x140	665	
SP18	38x140	425	
SP19	38x140	425	
SP14	38x140	225	
SP26	38x89	4800	ID6
SP30	38x89	3396	ID7
SP24	38x89	3366	ID3
SP28	38x89	3358	ID1, ID2
SP25	38x89	3285	ID4
SP29	38x89	1581	
SP27	38x89	1559	ID5

Door cut-aways are within the piece: fix the plate, then cut the door section away. All C16.

CHECK DIAGONALS

Block	Size	Diag 1	Diag 2
Main building	9225 x 6650	11372	11372
Block 2	3650 x 3675	5180	5180
Block 3	1500 x 6325	6500	6500
Block 4	3650 x 665	3710	3710
Main to Block 2	corner-corner	14491	13389
Main to Block 3	corner-corner	15362	13389
Main to Block 4	corner-corner	10459	6876
Block 5	5950 x 6150	8557	8557

Outer plate corners. Block diagonals equal; purple = main body to pop-out, match figures.

CONSUMABLES (NOT SHOWN)

Item	Quantity	Order
600mm DPC	62.1m + 17 laps	3 x 30m roll
300mm DPC	21.3m + 12 laps	1 x 30m roll
M7.5x100 concrete screw	156 (6.5mm pilot)	2 box of 100
Silicone 15ml per hole	2.34 L	10 x 280ml

DPC laps = own width at corners/junctions, +5%. Fixings +10%.

NOTES

1. Sole plates: 38x140 C16 under external and internal load-bearing walls; 38x89 C16 under internal partitions. Outer face of sole plate = outer face of timber frame.
2. DPC under all sole plates: 600mm wide centred under external walls, 300mm wide under internal walls. Lap DPC by its own width at every corner and junction.
3. Fix sole plates with M7.5x100 concrete screws at max 600mm centres, one 50mm from each door opening (retained side) and one at each plate end at corners and junctions.
4. Pre-drill each hole with a 6.5mm bit and fill with 15ml silicone before fixing.
5. Sole plate across door openings (hatched red) is left in for erection and CUT AWAY ON SITE.
6. Check each block for square before fixing: its two diagonals (blue dashed) must be equal.
7. Dimensions are to sole plate faces. Read with P4-GA-01 and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue
C02	14.09.26	Roof trusses revised; SP diagonals added

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

GROUND FLOOR SOLE PLATE SETTING OUT

DPC, fixings and silicone are scheduled - not shown

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-SP-01	C02

Do not scale. All dimensions in mm. Check all dimensions on site.