

P4-T4 SB2 TOP PLATE 50x145 C24 x L 2905 - 1 No.

TLS DETAIL - ENGINEER TO CONFIRM

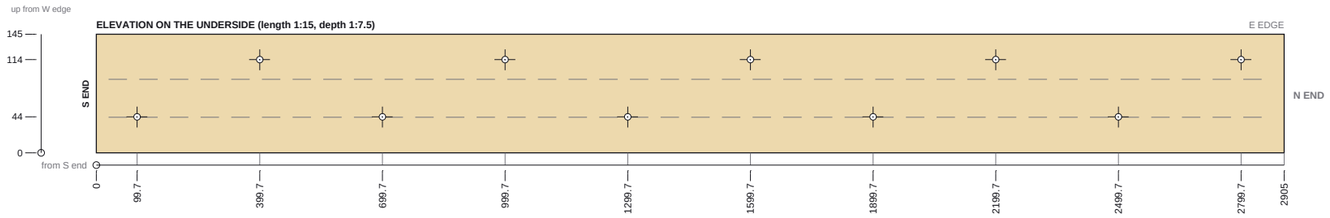



END SECTION 1:7.5


PIECE	P4-T4 - SB2 top plate 50x145 C24
FIXES TO	SB2 - its underside against the steel
CUT FROM	50x145 sawn x 3000; ripped to 145
HOLES	10 No. - pilot 8 x 42.2 deep from the underside
COUNTERBORE	none
FIXINGS	10 x M12x50 coach screw + washer
PURPOSE	sawn 50 ripped to 145: deck edge + FF-EX1 bearing; starts at the end of the top cope (y 9946), 30 clear of the south stone leaf


P4-T4 HOLES

#	from S	up W	dn E	hole	c'bore	fixing
1	99.7	44	101	8 x 42.2 pilot	-	M12 coach screw
2	399.7	114	31	8 x 42.2 pilot	-	M12 coach screw
3	699.7	44	101	8 x 42.2 pilot	-	M12 coach screw
4	999.7	114	31	8 x 42.2 pilot	-	M12 coach screw
5	1299.7	44	101	8 x 42.2 pilot	-	M12 coach screw
6	1599.7	114	31	8 x 42.2 pilot	-	M12 coach screw
7	1899.7	44	101	8 x 42.2 pilot	-	M12 coach screw
8	2199.7	114	31	8 x 42.2 pilot	-	M12 coach screw
9	2499.7	44	101	8 x 42.2 pilot	-	M12 coach screw
10	2799.7	114	31	8 x 42.2 pilot	-	M12 coach screw

P4-T5 SC1 JAMB PLATE 38x140 C16 x L 2462 - 1 No.

TLS DETAIL - ENGINEER TO CONFIRM

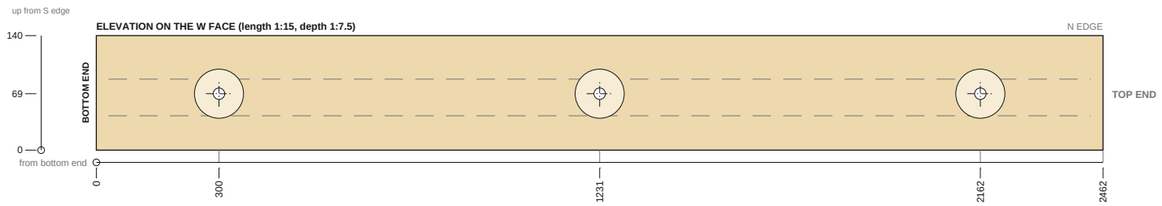



END SECTION 1:7.5


PIECE	P4-T5 - SC1 jamb plate 38x140 C16
FIXES TO	SC1 - its E face against the steel
CUT FROM	38x140 x 2700; as stock - no ripping
HOLES	3 No. - 14 through
COUNTERBORE	60 x 18 deep on the W face
FIXINGS	3 x M12 8.8 threaded rod 165 + 2 nuts (timber jamb)
PURPOSE	W face jamb plate: the panel jamb stud nails to it


P4-T5 HOLES

#	from bottom	up S	dn N	hole	c'bore	fixing
1	300	69	71	14 thru	60x18 W	M12 rod
2	1231	69	71	14 thru	60x18 W	M12 rod
3	2162	69	71	14 thru	60x18 W	M12 rod

P4-T6 SC1 JAMB PLATE 30x140 C24 x L 2462 - 1 No.

TLS DETAIL - ENGINEER TO CONFIRM

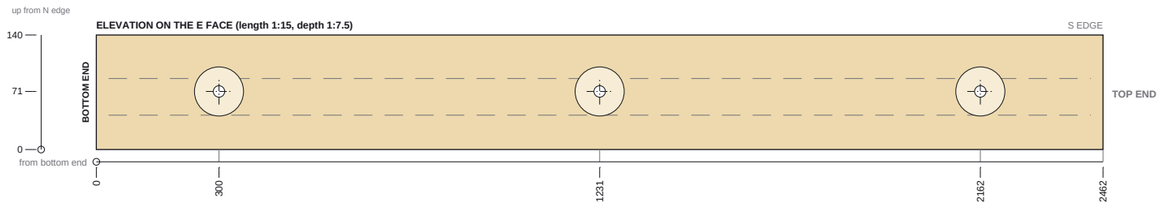



END SECTION 1:7.5

PIECE	P4-T6 - SC1 jamb plate 30x140 C24 ripped
FIXES TO	SC1 - its W face against the steel
CUT FROM	38x140 x 2700; ripped 30 from 38 (next stock size - joiner to confirm)
HOLES	3 No. - 14 through
COUNTERBORE	60 x 18 deep on the E face
FIXINGS	3 x M12 8.8 threaded rod 165 + 2 nuts (timber jamb)
PURPOSE	E face jamb plate: the panel jamb stud nails to it

P4-T6 HOLES

#	from bottom	up N	dn S	hole	c'bore	fixing
1	300	71	69	14 thru	60x18 E	M12 rod
2	1231	71	69	14 thru	60x18 E	M12 rod
3	2162	71	69	14 thru	60x18 E	M12 rod

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. ALL TIMBER SUBJECT TO SITE MEASURE AGAINST THE ERECTED STEEL BEFORE DRILLING.
3. Timber: strength-graded to BS EN 14081, C16 / C24 as scheduled, regularised; preservative treatment to the project specification (by others). Treat all cut ends and drilled holes.
4. Holes: bolts, rods and studs drilled d + 2 (M12 = 14), square to the face. Counterbores flat-bottomed (Forstner), concentric with the hole. Coach screws pre-drilled per EN 1995-1-1 8.7.
5. Running dimensions from the named reference end; across dimensions from the named edge. Dimensions in mm.
6. Bolt spacings checked against EN 1995-1-1 8.5 as set by the client: end 7d, edge 4d (M12: 84 / 48). Shortfalls are listed in red on STT-00.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel timber packing drawings - first issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

TIMBER PACKING - SB2 TOP PLATE, SC1 JAMB PLATE

SCALE	SIZE	DATE	DRAWN
AS SHOWN	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-STT-02	C03

Do not scale. All dimensions in mm. Check all dimensions on site.