

P4-T10 SB4 HEAD BINDER (A) 38x140 C16 x L 2813 - 1 No.

TLS DETAIL - ENGINEER TO CONFIRM

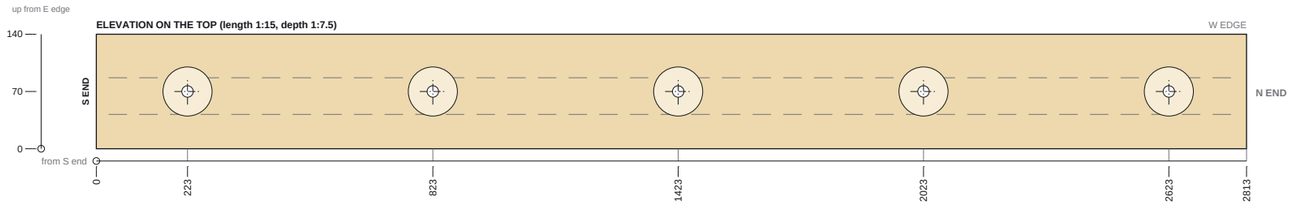





END SECTION 1:7.5

PIECE	P4-T10 - SB4 head binder 38x140 C16 (a)
FIXES TO	SB4 - its underside against the steel
CUT FROM	38x140 x 3000; as stock - no ripping
HOLES	5 No. - 14 through
COUNTERBORE	60 x 16 deep on the top
FIXINGS	5 x M12x55 stud welded to RHS + nut + washer
PURPOSE	head binder over the steel (GT1 bearing)

P4-T11 SB4 HEAD BINDER (B) 38x140 C16 x L 2813 - 1 No.

TLS DETAIL - ENGINEER TO CONFIRM

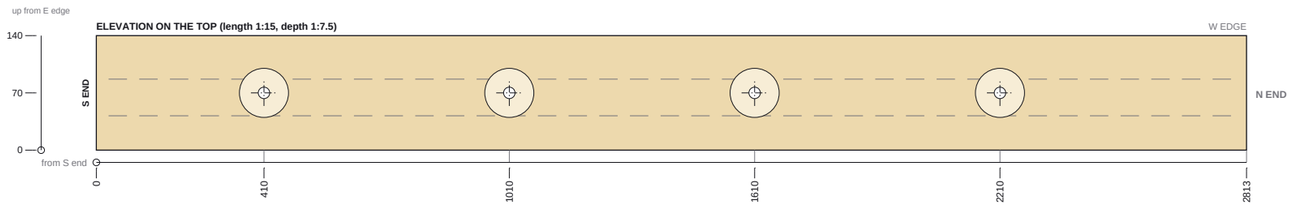





END SECTION 1:7.5

PIECE	P4-T11 - SB4 head binder 38x140 C16 (b)
FIXES TO	SB4 - its underside against the steel
CUT FROM	38x140 x 3000; as stock - no ripping
HOLES	4 No. - 14 through
COUNTERBORE	60 x 16 deep on the top
FIXINGS	4 x M12x55 stud welded to RHS + nut + washer
PURPOSE	head binder over the steel (GT1 bearing)

P4-T12 PC1 / PC2 JAMB PLATE 38x140 C16 x L 2400 - 2 No.

TLS DETAIL - ENGINEER TO CONFIRM

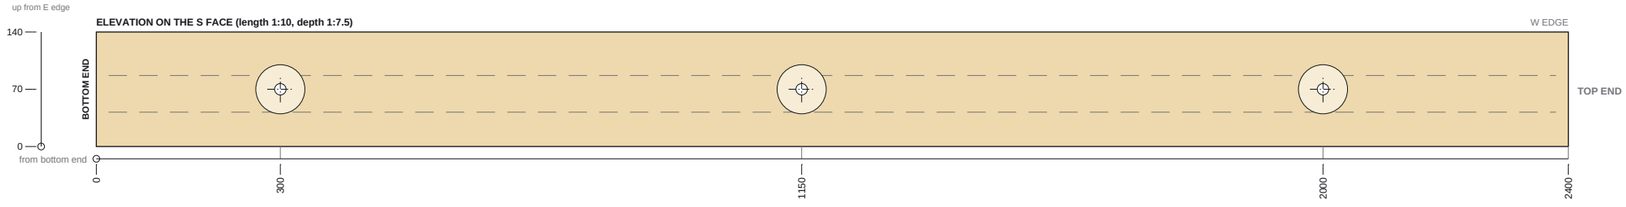



END SECTION 1:7.5

PIECE	P4-T12 - PC1 jamb plate 38x140 C16, PC2 jamb plate 38x140 C16
FIXES TO	PC1 - its N face against the steel (N face, S face)
CUT FROM	38x140 x 2700; as stock - no ripping
HOLES	3 No. - 14 through
COUNTERBORE	60 x 18 deep on the face away from the steel (N / S)
FIXINGS	3 x M12x160 8.8 bolt set (timber)
PURPOSE	jamb plate on the face against the return panel (to the underside of the post cap)

P4-T10 HOLES

#	from S	up E	dn W	hole	c'bore	fixing
1	223	70	70	14 thru	60x16 top	M12 stud
2	823	70	70	14 thru	60x16 top	M12 stud
3	1423	70	70	14 thru	60x16 top	M12 stud
4	2023	70	70	14 thru	60x16 top	M12 stud
5	2623	70	70	14 thru	60x16 top	M12 stud

P4-T11 HOLES

#	from S	up E	dn W	hole	c'bore	fixing
1	410	70	70	14 thru	60x16 top	M12 stud
2	1010	70	70	14 thru	60x16 top	M12 stud
3	1610	70	70	14 thru	60x16 top	M12 stud
4	2210	70	70	14 thru	60x16 top	M12 stud

P4-T12 HOLES

#	from bottom	up E	dn W	hole	c'bore	fixing
1	300	70	70	14 thru	60x18 outer	M12 bolt
2	1150	70	70	14 thru	60x18 outer	M12 bolt
3	2000	70	70	14 thru	60x18 outer	M12 bolt

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. ALL TIMBER SUBJECT TO SITE MEASURE AGAINST THE ERECTED STEEL BEFORE DRILLING.
3. Timber: strength-graded to BS EN 14081, C16 / C24 as scheduled, regularised; preservative treatment to the project specification (by others). Treat all cut ends and drilled holes.
4. Holes: bolts, rods and studs drilled d + 2 (M12 = 14), square to the face. Counterbores flat-bottomed (Forstner), concentric with the hole. Coach screws pre-drilled per EN 1995-1-1 8.7.
5. Running dimensions from the named reference end; across dimensions from the named edge. Dimensions in mm.
6. Bolt spacings checked against EN 1995-1-1 8.5 as set by the client: end 7d, edge 4d (M12: 84 / 48). Shortfalls are listed in red on STT-00.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel timber packing drawings - first issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

TIMBER PACKING - T10 TO T12

SCALE	SIZE	DATE	DRAWN
AS SHOWN	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-STT-04	C03

Do not scale. All dimensions in mm. Check all dimensions on site.