

SB1 ELEVATION

Scale 1:15 | viewed from the E side, end A (S) left

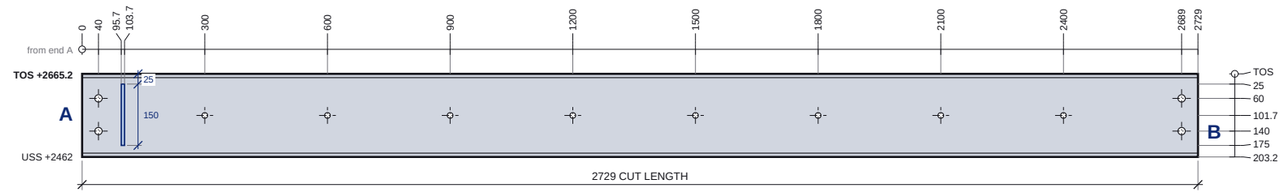


SB1 TOP FLANGE - PLAN

1:15

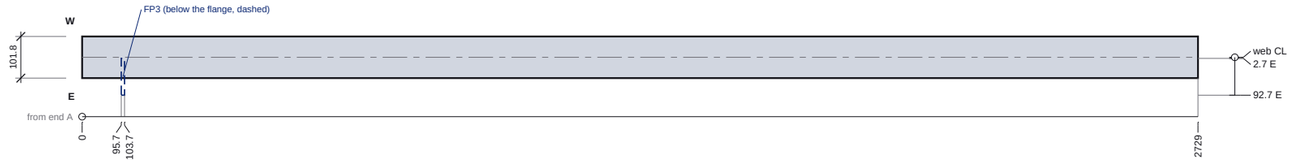

END A 1:5


Detail C (SC2): fin plate FP1 welted to SC2

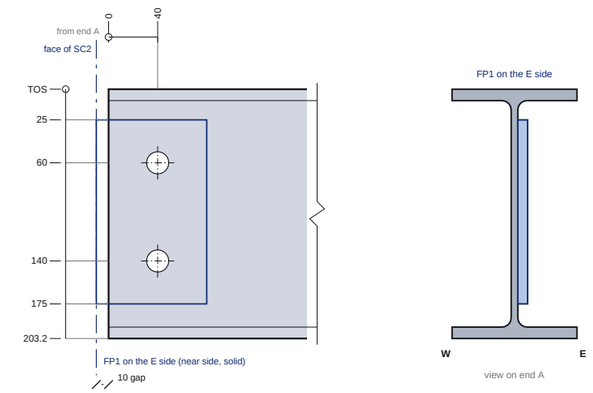


2 no. M16 8.8 bolts in Ø18 holes (bolts loose, site fixed)

END B 1:5


Detail C (SC1): fin plate FP2 welted to SC1

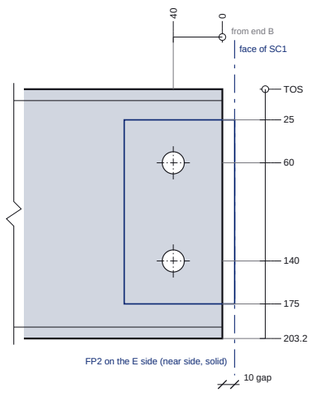

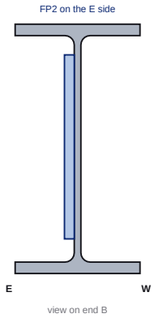

2 no. M16 8.8 bolts in Ø18 holes (bolts loose, site fixed)

FP3 PLATE DETAIL 1:5



150 x 90 x 8 thk S275
2 no. Ø18 holes
0.82 kg qty 1 on SB1
Weld: 8mm double fillet weld (both sides)
SB1 E web face for SB3 end A (B)

HOLE SCHEDULE

No.	FACE	X FROM A	POSITION	HOLE	PURPOSE
H1	web	40	60 below TOS	Ø18	M16 8.8 bolt - C (SC2) (FP1 on SC2)
H2	web	40	140 below TOS	Ø18	M16 8.8 bolt - C (SC2) (FP1 on SC2)
H3	web	2689	60 below TOS	Ø18	M16 8.8 bolt - C (SC1) (FP2 on SC1)
H4	web	2689	140 below TOS	Ø18	M16 8.8 bolt - C (SC1) (FP2 on SC1)
H5	web	300	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H6	web	600	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H7	web	900	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H8	web	1200	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H9	web	1500	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H10	web	1800	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H11	web	2100	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]
H12	web	2400	101.7 below TOS	Ø14	M12 - west packer [TLS detail - engineer to confirm]

CUT LIST

MARK	ITEM	GRADE	LENGTH	QTY	KG
SB1	UB203x102x23	S355JR	2729	1	63.0
FP3	PL 150x90x8	S275		1	0.82
TOTAL					**63.9 kg**

CONNECTIONS

Detail C (SC2): SB1 end A on SC2 - 150x90x8 S275 fin plate welded to SC2 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10

Detail C (SC1): SB1 end B on SC1 - 150x90x8 S275 fin plate welded to SC1 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10

Detail B: SB3 end A on SB1 - 150x90x8 S275 fin plate welded to SB1 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10; cope 50 long x 25 deep top and bottom

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION.
3. BS EN 1090-2 EXC2, CE marked. UB S355JR (EN 10025-2), plates S275JR.
4. Holes: normal clearance (EN 1090-2 Table 11): M12 = 14, M16 = 18. Drilled or punched full size, deburred.
5. Running dimensions from end A / base underside (o = datum). Levels above FFL (model 0).
6. Coating: Hot-dip galvanised to BS EN ISO 1461 (thickness to Table 3); T-wash + paint where exposed (architect).
7. Holes / plates marked TLS detail are not on the engineer's drawings: TLS detail - engineer to confirm before fabrication.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

SB1 UB203X102X23 FABRICATION

Under the FF west wall stone leaf, SC2 -> SC1

SCALE	SIZE	DATE	DRAWN
1:15 / details as noted	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-ST-SB1	C03

Do not scale. All dimensions in mm. Check all dimensions on site.