

SB3 ELEVATION

Scale 1:15 | viewed from the S side, end A (W) left

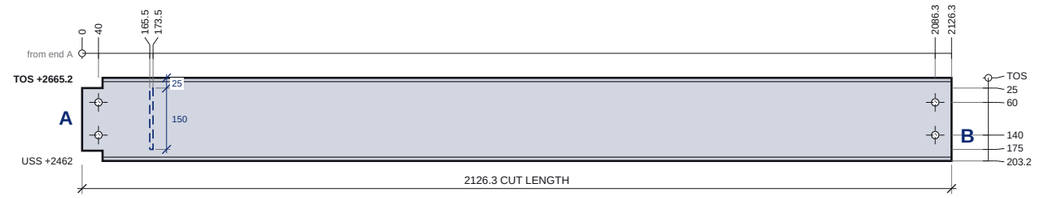


SB3 TOP FLANGE - PLAN

1:15

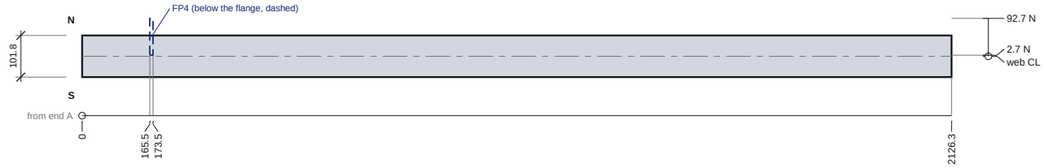

END A 1:5


Detail B: fin plate FP3 welted to SB1

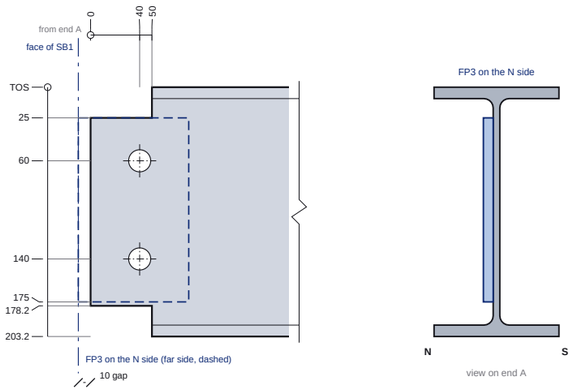

cope 50 long x 25 deep top + bottom
2 no. M16 8.8 bolts in Ø18 holes (bolts loose, site fixed)


END B 1:5

Detail C (SC3): fin plate FP5 welted to SC3

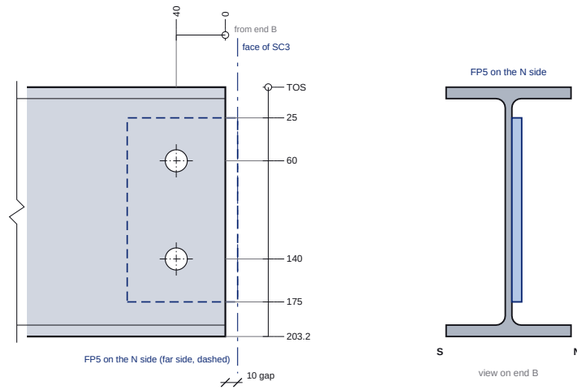

2 no. M16 8.8 bolts in Ø18 holes (bolts loose, site fixed)

FP4 PLATE DETAIL 1:5



150 x 90 x 8 thk S275
2 no. Ø18 holes
0.82 kg qty 1 on SB3
Weld: 8mm double fillet weld (both sides)
SB3 N web face for SB2 end A (A)

HOLE SCHEDULE

No.	FACE	X FROM A	POSITION	HOLE	PURPOSE
H1	web	40	60 below TOS	Ø18	M16 8.8 bolt - B (FP3 on SB1)
H2	web	40	140 below TOS	Ø18	M16 8.8 bolt - B (FP3 on SB1)
H3	web	2086.3	60 below TOS	Ø18	M16 8.8 bolt - C (SC3) (FP5 on SC3)
H4	web	2086.3	140 below TOS	Ø18	M16 8.8 bolt - C (SC3) (FP5 on SC3)

CUT LIST

MARK	ITEM	GRADE	LENGTH	QTY	KG
SB3	UB203x102x23	S355JR	2126.3	1	49.1
FP4	PL 150x90x8	S275		1	0.82
TOTAL					**49.9 kg**

CONNECTIONS

Detail B: SB3 end A on SB1 - 150x90x8 S275 fin plate welded to SB1 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10; cope 50 long x 25 deep top and bottom

Detail A: SB2 end A on SB3 - 150x90x8 S275 fin plate welded to SB3 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10; cope 50 long x 25 deep top and bottom

Detail C (SC3): SB3 end B on SC3 - 150x90x8 S275 fin plate welded to SC3 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION.
3. BS EN 1090-2 EXC2, CE marked. UB S355JR (EN 10025-2), plates S275JR.
4. Holes: normal clearance (EN 1090-2 Table 11): M12 = 14, M16 = 18. Drilled or punched full size, deburred.
5. Running dimensions from end A / base underside (o = datum). Levels above FFL (model 0).
6. Coating: Hot-dip galvanised to BS EN ISO 1461 (thickness to Table 3); T-wash + paint where exposed (architect).
7. Copes: re-entrant corners radiused 10 min (BS EN 1090-2 6.7, 5 min), cut edges ground smooth.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue

TLS TIMBER FRAME DESIGN SUITE

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

SB3 UB203X102X23 FABRICATION

Under the FF south wall stone leaf, SB1 -> SC3

SCALE	SIZE	DATE	DRAWN
1:15 / details as noted	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-ST-SB3	C03

Do not scale. All dimensions in mm. Check all dimensions on site.