
SC3 FACE ELEVATIONS

Scale 1:20 | heights above the underside of the baseplate (-125)

Base underside -125 = height 0; top of cap +2665.2 = height 2790.2

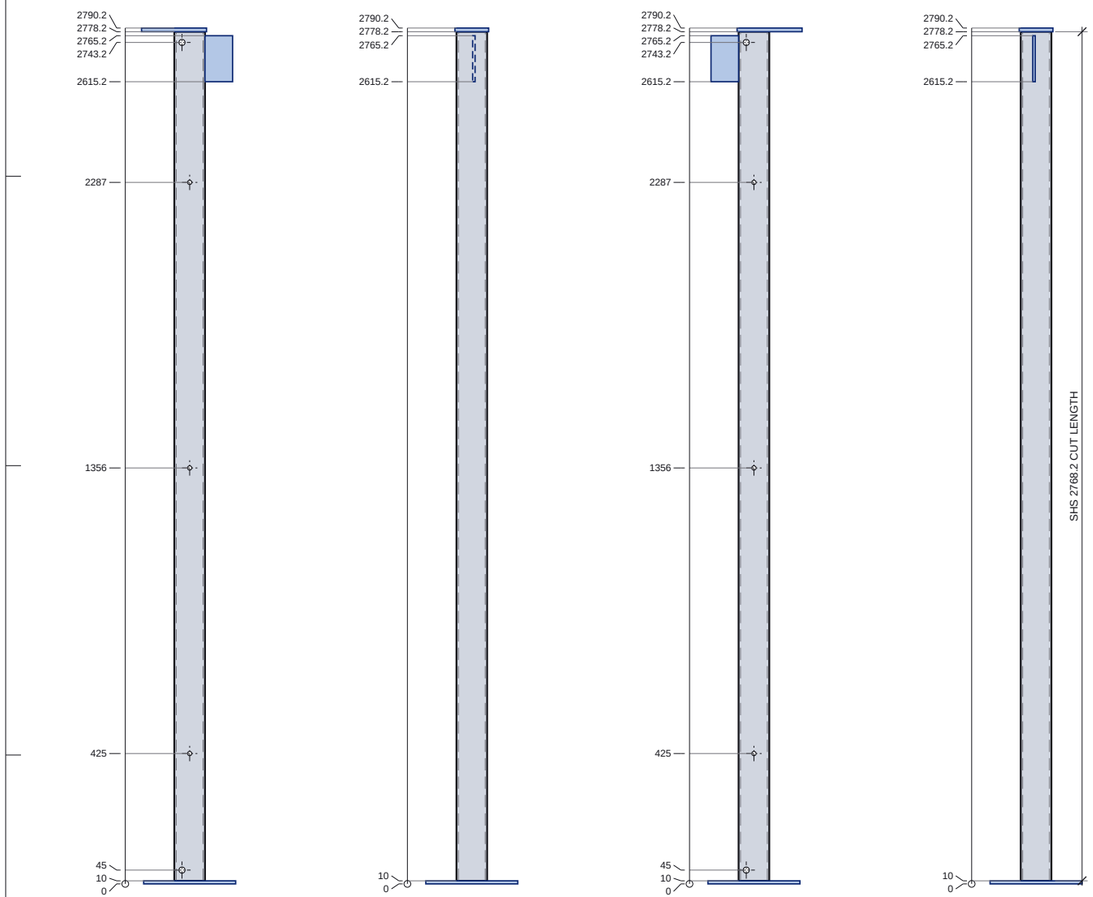

N FACE — from N: E left, W right

E FACE — from E: S left, N right

S FACE — from S: W left, E right

W FACE — from W: N left, S right


Plates dashed = behind the post in that view. Holes: see the schedule below.

HOLE SCHEDULE

No.	FACE	HEIGHT	POSITION	HOLE	PURPOSE
H1	N	2743.2	25 E	Ø20	Ø20 galvanising vent / drain (top), HDG drive-in plug after galvanising [TLS detail - engineer to confirm]
H2	S	2743.2	25 W	Ø20	Ø20 galvanising vent / drain (top), HDG drive-in plug after galvanising [TLS detail - engineer to confirm]
H3	N	45	25 E	Ø20	Ø20 galvanising vent / drain (bottom), HDG drive-in plug after galvanising [TLS detail - engineer to confirm]
H4	S	45	25 W	Ø20	Ø20 galvanising vent / drain (bottom), HDG drive-in plug after galvanising [TLS detail - engineer to confirm]
H5	through-NS	425	on CL	Ø14	M12 rod (173) through-bolt for the timber jamb plates (snug tight - do not crush the SHS) [TLS detail - engineer to confirm]
H6	through-NS	1356	on CL	Ø14	M12 rod (173) through-bolt for the timber jamb plates (snug tight - do not crush the SHS) [TLS detail - engineer to confirm]
H7	through-NS	2287	on CL	Ø14	M12 rod (173) through-bolt for the timber jamb plates (snug tight - do not crush the SHS) [TLS detail - engineer to confirm]


BP3 BASEPLATE PLAN 1:10

from above, N up

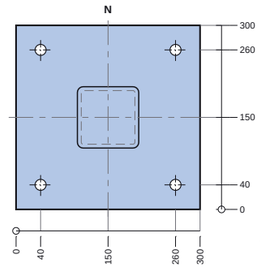

PL 300 x 300 x 10 S275 (6.99 kg)
4 no. Ø18 holes; dims from the SW corner; post CL dash-dot
Weld to the SHS: 8mm FW all round

FP5 ON THE W FACE 1:10



post side view (paper right = W)

Plate faces at 2.7 N and 10.7 N of the post CL (8 thk)
top 2765.2 / bottom 2615.2 above base u/s; top 25 below the cap top (= TOS)
Weld: 8mm double fillet weld (both sides)

CP3 CAP PLATE PLAN 1:10

from above, N up

PL 212 x 110 x 12 S275 (2.20 kg)
no holes; dims from the SW corner; post CL dash-dot
Weld to the SHS: 6mm FW all round (cap oversails 5 min)
ECCENTRIC: extends 157 E / 55 W / 55 N / 55 S of the post CL
TLS detail - engineer to confirm

FP5 PLATE DETAIL 1:5

150 x 90 x 8 thk S275
2 no. Ø18 holes
0.82 kg qty 1 on SC3
Weld: 8mm double fillet weld (both sides)
SC3 W face for SB3 end B (C (SC3))

CUT LIST

MARK	ITEM	GRADE	LENGTH	QTY	KG
SC3	SHS100x100x6.3	S355J2H	2768.2	1	50.4
BP3	PL 300x300x10	S275		1	6.99
CP3	PL 212x110x12	S275		1	2.20
FP5	PL 150x90x8	S275		1	0.82
TOTAL					**60.4 kg**

CONNECTIONS

Detail C (SC3): SB3 end B on SC3 - 150x90x8 S275 fin plate welded to SC3 (8mm double fillet weld (both sides)); 2 no. M16 8.8 bolts, Ø18 holes; bolt line 50 from the support face, 40 to the plate end; pitch 35/80/35; plate top 25 below TOS; beam end gap 10

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION.
3. BS EN 1090-2 EXC2, CE marked. SHS S355J2H (EN 10210-1), plates S275JR.
4. Holes: normal clearance (EN 1090-2 Table 11): M12 = 14, M16 = 18. Drilled or punched full size, deburred.
5. Running dimensions from end A / base underside (o = datum). Levels above FFL (model 0).
6. Coating: Hot-dip galvanised to BS EN ISO 1461 (thickness to Table 3); T-wash + paint where exposed (architect).
7. Vent / drain holes: plug after galvanising.
8. Holes / plates marked TLS detail are not on the engineer's drawings: TLS detail - engineer to confirm before fabrication.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

SC3 SHS100X100X6.3 POST FABRICATION

SHS post, base -125 on 25 shims over a padstone at -150 (by others)

SCALE	SIZE	DATE	DRAWN
1:20 / 1:5 / as noted	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-ST-SC3	C03

Do not scale. All dimensions in mm. Check all dimensions on site.