

P4-T7 SC2 JAMB PLATE 38x89 C16 x L 2462 - 2 No.

TLS DETAIL - APPROVED BY THE ENGINEER

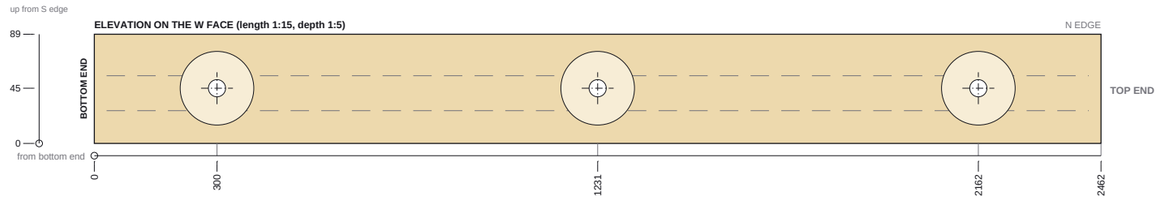





PIECE	P4-T7 - SC2 jamb plate 38x89 C16, SC2 jamb plate 38x89 C16
FIXES TO	SC2 - its E face against the steel (E face, W face)
CUT FROM	38x89 x 2700; as stock - no ripping
HOLES	3 No. - 14 through
COUNTERBORE	60 x 18 deep on the face away from the steel (E / W)
FIXINGS	3 x M12 8.8 threaded rod 173 + 2 nuts (timber jamb)
PURPOSE	W face jamb plate: the panel jamb stud nails to it

P4-T8 SC3 JAMB PLATE 38x140 C16 x L 2462 - 2 No.

TLS DETAIL - APPROVED BY THE ENGINEER

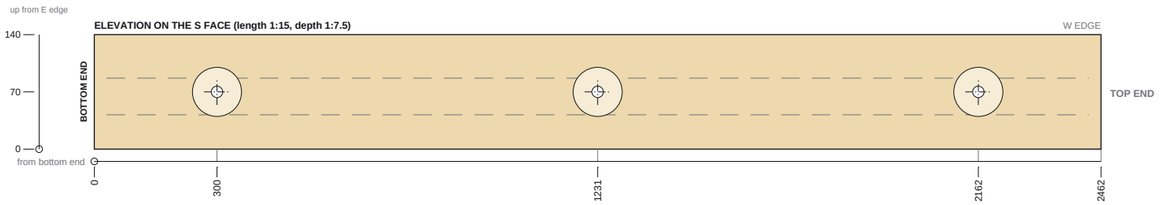





PIECE	P4-T8 - SC3 jamb plate 38x140 C16, SC3 jamb plate 38x140 C16
FIXES TO	SC3 - its N face against the steel (N face, S face)
CUT FROM	38x140 x 2700; as stock - no ripping
HOLES	3 No. - 14 through
COUNTERBORE	60 x 18 deep on the face away from the steel (N / S)
FIXINGS	3 x M12 8.8 threaded rod 173 + 2 nuts (timber jamb)
PURPOSE	S face jamb plate: the panel jamb stud nails to it

P4-T9 SB4 PACKER 14x140 marine ply x L 5540 - 1 No.

TLS DETAIL - APPROVED BY THE ENGINEER

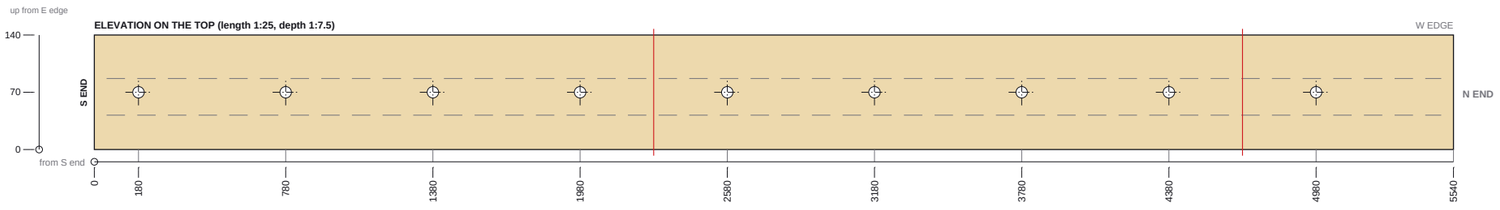



PIECE	P4-T9 - SB4 packer 14mm marine ply 140
FIXES TO	SB4 - its underside against the steel
CUT FROM	2440 x 1220 sheet, 14 thick; rip 140 strips
LENGTHS	3 lengths 2280 + 2400 + 860 (joints at 2280, 4680 from the S end, midway between studs; red on the elevation)
HOLES	9 No. - 14 through
COUNTERBORE	none
FIXINGS	9 x M12x55 stud welded to RHS + nut + washer
PURPOSE	packer under the head binder, over the RHS and the post caps (3 lengths from 2440 sheets, joints over the RHS)

P4-T7 HOLES

#	from bottom	up S	dn N	hole	c'bore	fixing
1	300	45	44	14 thru	60x18 outer	M12 rod
2	1231	45	44	14 thru	60x18 outer	M12 rod
3	2162	45	44	14 thru	60x18 outer	M12 rod

P4-T8 HOLES

#	from bottom	up E	dn W	hole	c'bore	fixing
1	300	70	70	14 thru	60x18 outer	M12 rod
2	1231	70	70	14 thru	60x18 outer	M12 rod
3	2162	70	70	14 thru	60x18 outer	M12 rod

P4-T9 HOLES

#	from S	up E	dn W	hole	c'bore	fixing
1	180	70	70	14 thru	-	M12 stud
2	780	70	70	14 thru	-	M12 stud
3	1380	70	70	14 thru	-	M12 stud
4	1980	70	70	14 thru	-	M12 stud
5	2580	70	70	14 thru	-	M12 stud
6	3180	70	70	14 thru	-	M12 stud
7	3780	70	70	14 thru	-	M12 stud
8	4380	70	70	14 thru	-	M12 stud
9	4980	70	70	14 thru	-	M12 stud

NOTES

1. **APPROVED FOR CONSTRUCTION - the engineer approved the steelwork and the TLS details on 13.10.26; fabricate to these drawings.**
2. ALL TIMBER SUBJECT TO SITE MEASURE AGAINST THE ERECTED STEEL BEFORE DRILLING.
3. Timber: strength-graded to BS EN 14081, C16 / C24 as scheduled, regularised; preservative treatment to the project specification (by others). Treat all cut ends and drilled holes.
4. Holes: bolts, rods and studs drilled d + 2 (M12 = 14), square to the face. Counterbores flat-bottomed (Forstner), concentric with the hole. Coach screws pre-drilled per EN 1995-1-1 8.7.
5. Running dimensions from the named reference end; across dimensions from the named edge. Dimensions in mm.
6. Bolt spacings checked against EN 1995-1-1 8.5 as set by the client: end 7d, edge 4d (M12: 84 / 48). Shortfalls are listed in red on STT-00.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel timber packing drawings - first issue
C04	13.10.26	Approved by the engineer 13.10.26 - issued for construction

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

TIMBER PACKING - SC2 JAMB PLATE, SC3 JAMB PLATE, SB4 PACKER

SCALE	SIZE	DATE	DRAWN
AS SHOWN	A3	13.10.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-STT-03	C04

Do not scale. All dimensions in mm. Check all dimensions on site.