
PLAN

Scale 1:40 | north up

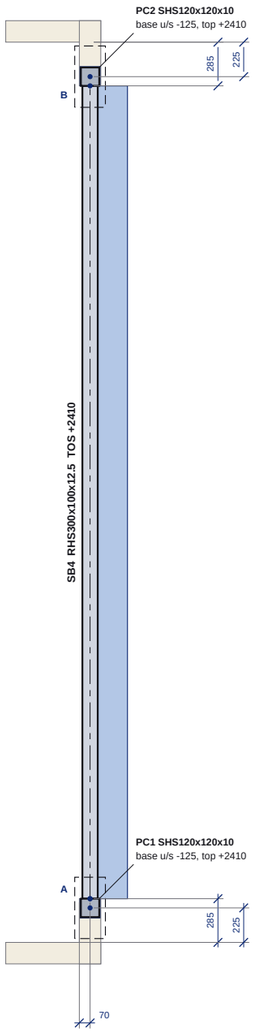


grey = GF timber frame (wall bands)

blue dims: beam end (on its CL) / post centre to the nearest GF frame face


ISOMETRIC FROM THE SOUTH-EAST

Scale 1:75 | axonometric, axis lengths x0.82

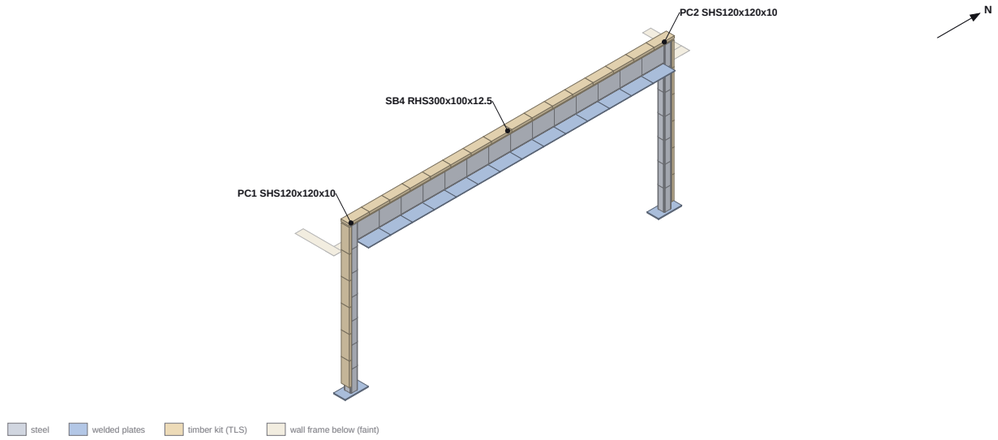

ISOMETRIC FROM THE NORTH-WEST

Scale 1:75 | axonometric, axis lengths x0.82

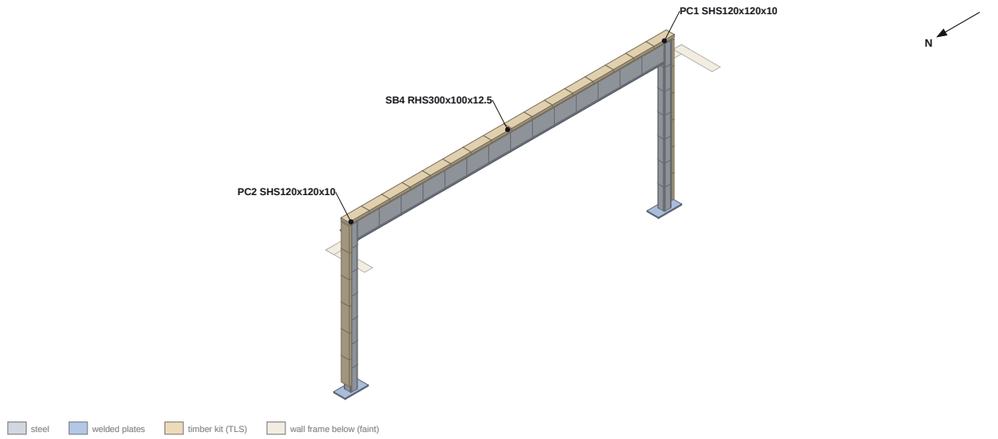

MEMBER SCHEDULE (KG INCL. WELDED PLATES)

MARK	SECTION	GRADE	CUT LENGTH	QTY	KG	TOS / BASE	COATING
SB4	RHS300x100x12.5	S355J2H	5300	1	505.4	+2410	HDG (EN ISO 1461)
PC1	SHS120x120x10	S355J2H	2510	1	95.2	base -125	HDG (EN ISO 1461)
PC2	SHS120x120x10	S355J2H	2510	1	95.2	base -125	HDG (EN ISO 1461)
TOTAL					**695.8**		

CONNECTION REFS

GP1 knee: SB4 end A/B on PC1/PC2

POST SET-OUT (CENTRES, MODEL MM)

POST	X	Y	BASE U/S	SECTION
PC1	5880	365	-125	SHS120x120x10
PC2	5880	5785	-125	SHS120x120x10

X / Y from the model origin 0,0 = outside faces of the GF frame at the garage SW corner (Wall 1). Padstones and anchors are set out from the model coordinates / the substructure set-out (402) before the frame is erected; check against the frame faces after.

BEAM END SET-OUT

BEAM	END	X	Y	TOS	USS	BEARING / CONNECTION
SB4	A	5880	425	+2410	+2110	Welded all round to the PC1 inner (N) face, 8 FW (GP1 knee, R4)
	B	5880	5725	+2410	+2110	Welded all round to the PC2 inner (S) face, 8 FW (GP1 knee, R4)

End points on the beam centre line at the cut end, model mm (origin as the post set-out). Bearing: the end condition in short - full text on the member sheet.

ENGINEER'S DRAWINGS

Skyhooks 26-431-S-0010 P01 (plan, KP, Details A/B/C, Baseplate Detail 2); 26-431-S-0011 P01 (general notes 3.01-3.07, 7.01, 9.02); 26-431-S-0012 P01 (loads)

NOTES

1. **APPROVED FOR CONSTRUCTION - the engineer approved the steelwork and the TLS details on 13.10.26; fabricate to these drawings.**
2. All steelwork to BS EN 1993-1 / BS EN 1090-2 EXC2, CE marked (S-0011 3.01-3.02). Bolts grade 8.8 (3.03), BS EN ISO 4014/4032; HDG bolts, nuts and washers to BS EN ISO 10684 (oversize-tapped nuts, S-0011 3.07).
3. Mark each member with its mark at end A (hard stamp, before galvanising); posts: 'N' on the baseplate.
4. UB S355JR (BS EN 10025-2); SHS / RHS S355J2H (BS EN 10210-1); plates S275JR.
5. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION (S-0010).
6. Welds: full profile and continuous unless noted (S-0011 3.04).
7. Copes: re-entrant corners radiused 10 min (BS EN 1090-2 6.7: no notches, 5 min), edges ground.
8. Post bases stop 25 above the padstone: HDG shim stacks at the mid-sides under the SHS walls (clear of the anchors), then non-shrink cementitious grout. Padstones by others.
9. Fire protection 30 min to all structural steel by others (S-0011 9.02).
10. Stone on SB1 / SB3: DPC on the flange; first course made up 2675 -> 2700 to course (10 bed + 140 stone from FFL).
11. Items marked TLS detail are not on the engineer's drawings; approved by the engineer 13.10.26.
12. Datum: Levels above FFL = model 0 (top of screed / underside of the GF sole plate)

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue
C04	13.10.26	Approved by the engineer 13.10.26 - issued for construction

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

GP1 GARAGE PORTAL

General arrangement SB4, PC1, PC2, TOS +2410: plan, isometric views, set-out, member schedule

SCALE	SIZE	DATE	DRAWN
as noted	A3	13.10.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-ST-00	C04

Do not scale. All dimensions in mm. Check all dimensions on site.