
PLAN

Scale 1:25 | north up

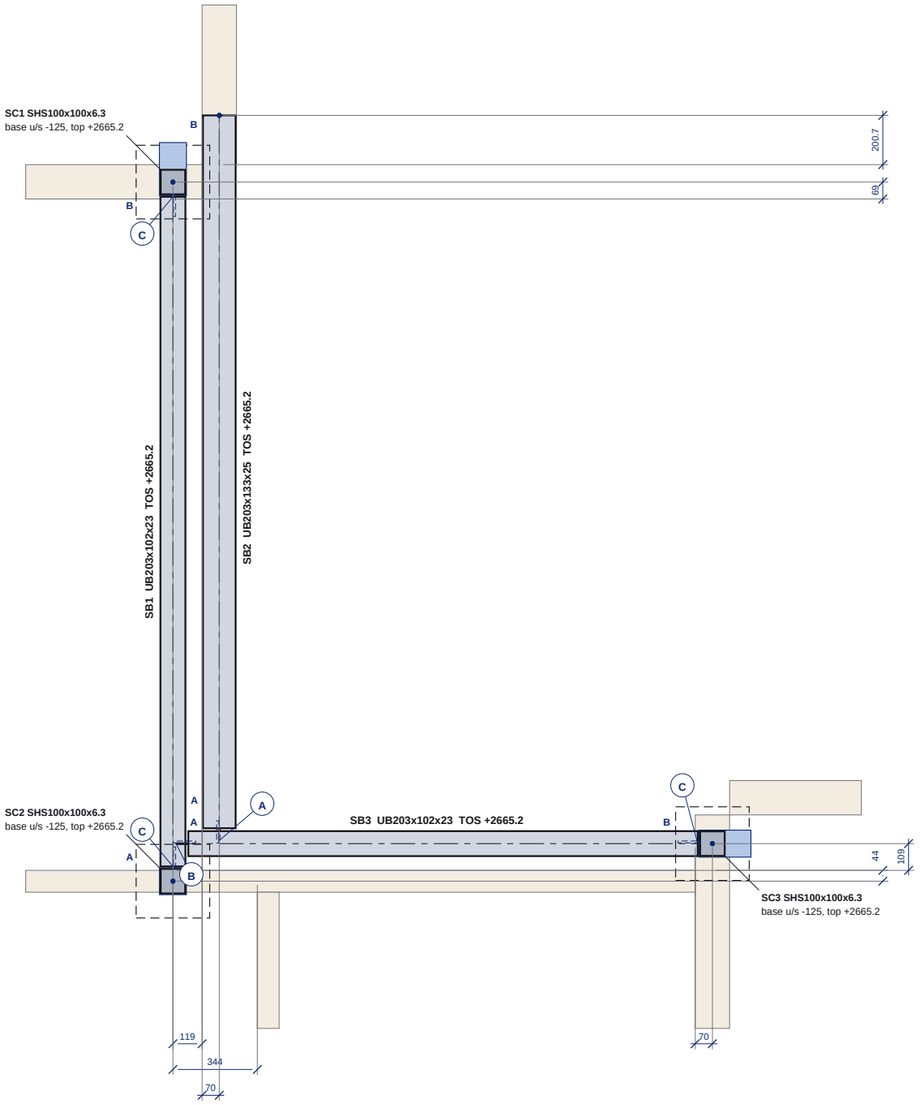


grey = GF timber frame (wall bands)

blue dims: beam end (on its CL) / post centre to the nearest GF frame face


ISOMETRIC FROM THE SOUTH-EAST

Scale 1:75 | axonometric, axis lengths x0.82

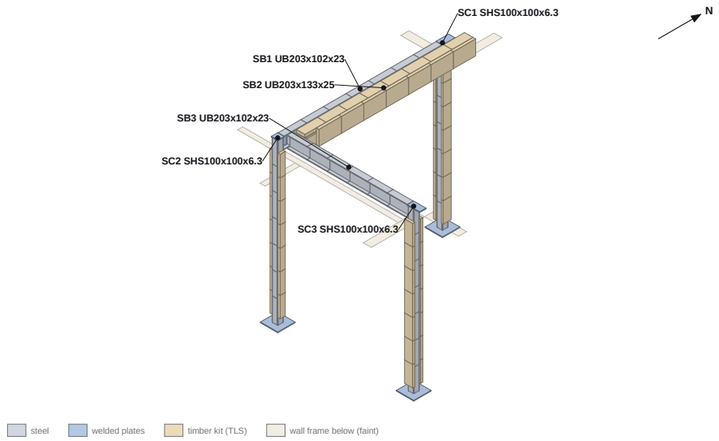

ISOMETRIC FROM THE NORTH-WEST

Scale 1:75 | axonometric, axis lengths x0.82

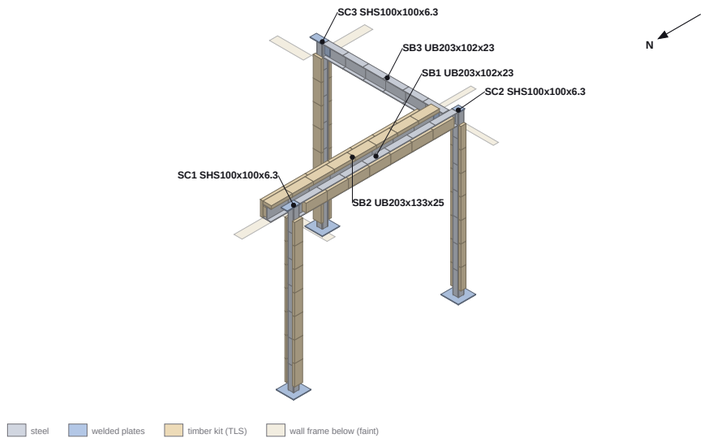

POST SET-OUT (CENTRES, MODEL MM)

POST	X	Y	BASE U/S	SECTION
SC1	2904	12579	-125	SHS100x100x6.3
SC2	2904	9730	-125	SHS100x100x6.3
SC3	5103	9883	-125	SHS100x100x6.3

X / Y from the model origin 0,0 = outside faces of the GF frame at the garage SW corner (Wall 1). Padstones and anchors are set out from the model coordinates / the substructure set-out (402) before the frame is erected; check against the frame faces after.

BEAM END SET-OUT

BEAM	END	X	Y	TOS	USS	BEARING / CONNECTION
SB1	A	2904	9790	+2665.2	+2462	Detail C (SC2): FP1 fin on SC2, 10 gap
	B	2904	12519	+2665.2	+2462	Detail C (SC1): FP2 fin on SC1, 10 gap
SB2	A	3093	9895.7	+2665.2	+2462	Detail A: FP4 fin on SB3, 10 gap
	B	3093	12850.7	+2665.2	+2462	Bears 150 on the GF-EX16 4-ply stud pack end grain
SB3	A	2916.7	9883	+2665.2	+2462	Detail B: FP3 fin on SB1, 10 gap
	B	5043	9883	+2665.2	+2462	Detail C (SC3): FP5 fin on SC3, 10 gap

End points on the beam centre line at the cut end, model mm (origin as the post set-out). Bearing: the end condition in short - full text on the member sheet.

ENGINEER'S DRAWINGS

Skyhooks 26-431-S-0010 P01 (plan, KP, Details A/B/C, Baseplate Detail 2); 26-431-S-0011 P01 (general notes 3.01-3.07, 7.01, 9.02); 26-431-S-0012 P01 (loads)

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. All steelwork to BS EN 1993-1 / BS EN 1090-2 EXC2, CE marked (S-0011 3.01-3.02). Bolts grade 8.8 (3.03), BS EN ISO 4014/4032; HDG bolts, nuts and washers to BS EN ISO 10684 (oversize-tapped nuts, S-0011 3.07).
3. Mark each member with its mark at end A (hard stamp, before galvanising); posts: 'N' on the baseplate.
4. UB S355JR (BS EN 10025-2); SHS / RHS S355J2H (BS EN 10210-1); plates S275JR.
5. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION (S-0010).
6. Welds: full profile and continuous unless noted (S-0011 3.04).
7. Copes: re-entrant corners radiused 10 min (BS EN 1090-2 6.7: no notches, 5 min), edges ground.
8. Post bases stop 25 above the padstone: HDG shim stacks at the mid-sides under the SHS walls (clear of the anchors), then non-shrink cementitious grout. Padstones by others.
9. Fire protection 30 min to all structural steel by others (S-0011 9.02).
10. Stone on SB1 / SB3: DPC on the flange; first course made up 2675 -> 2700 to course (10 bed + 140 stone from FFL).
11. Items marked TLS detail are not on the engineer's drawings - engineer to confirm.
12. Datum: Levels above FFL = model 0 (top of screed / underside of the GF sole plate)

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue

MEMBER SCHEDULE (KG INCL. WELDED PLATES)

MARK	SECTION	GRADE	CUT LENGTH	QTY	KG	TOS / BASE	COATING
SB1	UB203x102x23	S355JR	2729	1	63.9	+2665.2	HDG (EN ISO 1461)
SB2	UB203x133x25	S355JR	2955	1	74.2	+2665.2	Shop primer (C2)
SB3	UB203x102x23	S355JR	2126.3	1	49.9	+2665.2	HDG (EN ISO 1461)
SC1	SHS100x100x6.3	S355J2H	2768.2	1	60.4	base -125	HDG (EN ISO 1461)
SC2	SHS100x100x6.3	S355J2H	2768.2	1	59.3	base -125	HDG (EN ISO 1461)
SC3	SHS100x100x6.3	S355J2H	2768.2	1	60.4	base -125	HDG (EN ISO 1461)
TOTAL					**368.1**		

ITEMS FOR THE ENGINEER

1. SC1 / SC3 300x300 baseplates reach −70 into the cavity zone: accept, offset, or reduce (bearing does not govern).
2. Padstone size / depth / grade and R-KEM II edge distances (substructure by others).
3. GLF 140x240 to SB2 connection not detailed on S-0010 (HOLD).
4. SC1 / SC3 cap plates extended to bridge the stone to the GF leaf (12 thk) - confirm.
5. Head binder continuity across the post pockets.
6. Detail C leader reads 'welded to beam' - TLS reads the plate as welded to the SHS face.
7. SC2 (100 SHS) projects 5.5 beyond each face of the 89 GF-IN1 partition: boxed by the dryliner - confirm.
8. Cap plates (12, oversailing 5) and Ø20 galvanising vents are TLS additions - confirm.
9. SB2 coating: C2 shop primer per S-0010, but its end A sits in the external-wall cavity zone - confirm (HDG?).
10. SB2 north bearing: on the GF-EX16 4-ply stud end grain (studs to the steel, rail + binder cut) - confirm.
11. Stone overhangs SB1 by 14 / SB3 by 16 (positions per S-0010).
12. MT1 lean-to trusses must stop at x 2829 (10 clear of the stone face 2839) to hang on the SB1 70 packer (Acorn).
13. GP1 garage portal R4: whole design (loads, deflection 6.9 mm vs the client's 8 mm, knee welds + post face, base fixity, wind share, padstones min 500 x 300 on the garage return foundations).

CONNECTION REFS

C (SC2): SB1 end A on SC2 (FP1)
C (SC1): SB1 end B on SC1 (FP2)
B: SB3 end A on SB1 (FP3)
A: SB2 end A on SB3 (FP4)
C (SC3): SB3 end B on SC3 (FP5)

Do not scale. All dimensions in mm. Check all dimensions on site.

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

GF STEELWORK (FIRST-FLOOR ZONE)

General arrangement SB1-SB3, SC1-SC3, TOS +2665.2: plan, isometric views, set-out, member schedule

SCALE	SIZE	DATE	DRAWN
as noted	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-ST-00	C03