
DETAIL A BEAM TO BEAM

Scale 1:5

SB2 end A on SB3

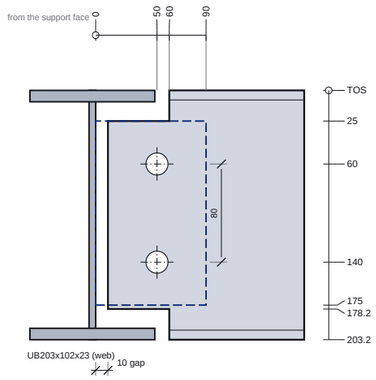


150x90x8 S275 fin plate welded to SB3, 8 FW both sides
2 no. M16 8.8, Ø18; bolt line 50 from the support face, 40 to the plate end
pitch 35/80/35; plate top 25 below TOS; end gap 10
cope 50 long x 25 deep, top + bottom
ref Skyhooks 26-431-S-0010 Detail A

DETAIL B BEAM TO BEAM

Scale 1:5

SB3 end A on SB1

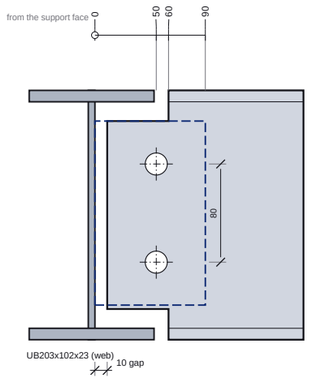


150x90x8 S275 fin plate welded to SB1, 8 FW both sides
2 no. M16 8.8, Ø18; bolt line 50 from the support face, 40 to the plate end
pitch 35/80/35; plate top 25 below TOS; end gap 10
cope 50 long x 25 deep, top + bottom
ref Skyhooks 26-431-S-0010 Detail B

DETAIL C BEAM TO SHS

Scale 1:5


SB1 end A on SC2; SB1 end B on SC1; SB3 end B on SC3

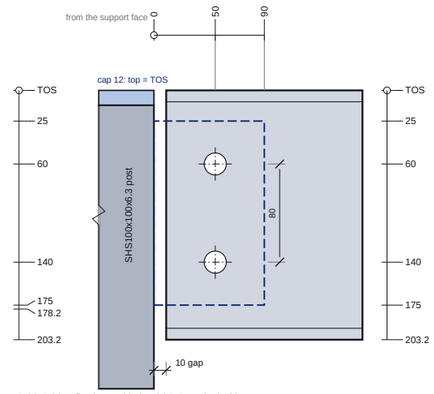

150x90x8 S275 fin plate welded to SC2, 8 FW both sides
2 no. M16 8.8, Ø18; bolt line 50 from the support face, 40 to the plate end
pitch 35/80/35; plate top 25 below TOS; end gap 10
ref Skyhooks 26-431-S-0010 Detail C
post stops under its cap plate (CP1/CP2/CP3); cap top = TOS
S-0010 leader reads 'welded to beam': TLS reads it as welded to the SHS face (RFI)

COURSING SECTION - SB1 AT THE LEAN-TO


Scale 1:10 | looking north

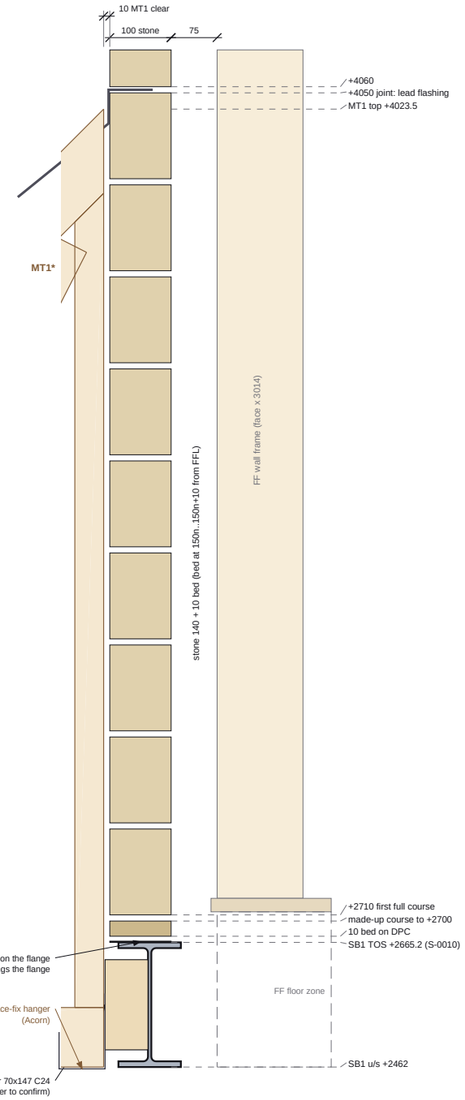

* MT1 (Acorn) ends at x 2829, 10 clear of the stone face; hangs on the SB1 70 packer face


BASEPLATE DETAIL (DETAIL 2)

Scale 1:5 | SC1, SC2, SC3

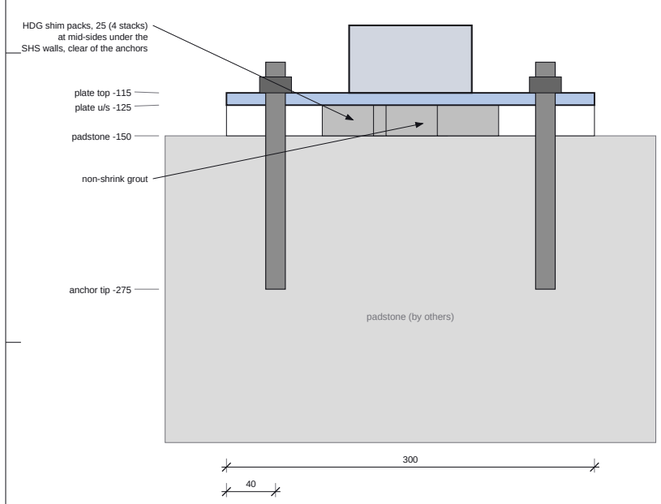

BP1/BP2/BP3: PL 300x300x10 S275, 8mm FW all round
4 no. M16 8.8 HDG threaded rod x 200, Rawlplug R-KEM II resin, Ø18 x 125 embedment,
1 nut + 1 washer above the plate; Ø18 fixture holes 40 from the plate edges.
Base underside -125: stops 25 above the padstone (top -150) - HDG shim packs
50x50, 4 stacks (consumables), then non-shrink cementitious grout to the 25 gap.
Shim stacks at mid-sides under the SHS walls, clear of the anchors (plan below).
Padstone min 400x400x250 C25/30, anchor edge distance >= 80 (ETA): by others,
engineer to confirm. Seal the SHS at the DPM.

SHIM LAYOUT - PLAN 1:10



grey = shim stacks (4 no.) under the SHS walls (dashed)
anchors 40 from the plate edges
grout the 25 gap after levelling

NOTES

1. **FOR APPROVAL - NOT FOR FABRICATION until the engineer has approved the TLS details and returned the steel drawings.**
2. Details redrawn to TLS dimensions from Skyhooks 26-431-S-0010 P01 (Details A / B / C, Baseplate Detail 2). The engineer's drawing governs; TLS additions flagged.
3. ALL STEELWORK SUBJECT TO SITE MEASURE BEFORE FABRICATION.
4. Fin plates S275, welded to the SUPPORTING member, 8 mm double fillet weld. Bolts M16 8.8 + nut + 2 washers, HDG, in Ø18 holes.

REVISIONS

REV	DATE	DESCRIPTION
C03	11.10.26	Steel fabrication drawings - first issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

STEEL CONNECTION AND COURSING DETAILS

Details A / B / C, baseplate, coursing section through SB1 at the lean-to abutment

SCALE	SIZE	DATE	DRAWN
1:5 / 1:10	A3	11.10.26	TS

STATUS	DRAWING No.	REV
FOR APPROVAL	P4-ST-DET	C03

Do not scale. All dimensions in mm. Check all dimensions on site.