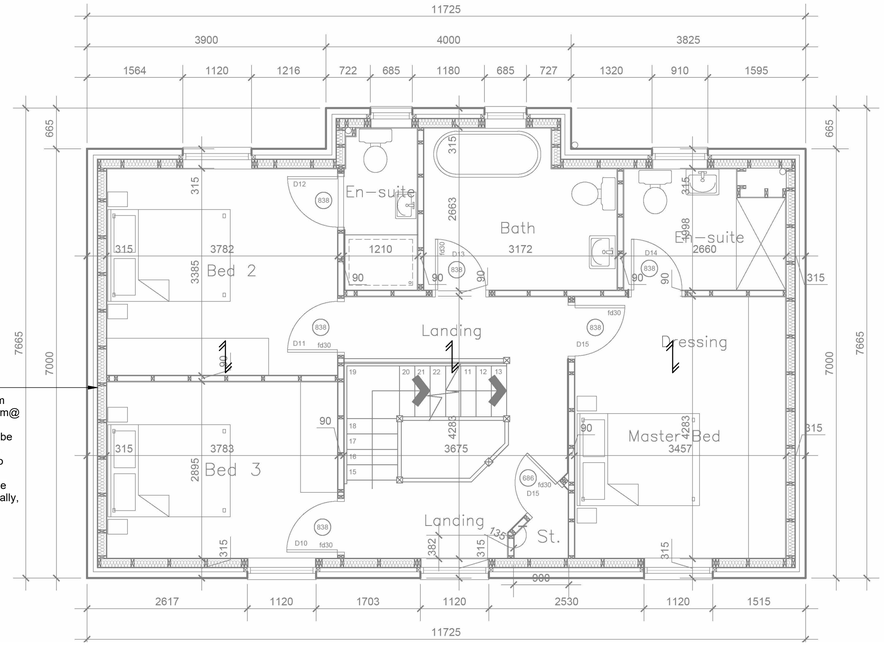


Note:

Indicates span of attic trussed rafters, to be designed and detailed by a specialist contractor.

External Wall Specification:
38x140 C16 studs @ 600mm c/c with 9mm OSB/3 fixed to external face with 3.1x50mm@ 150c/c smooth round nails.
Lintels over window and door openings to be 3/47x150 C24 with bearing onto min. 2No. stud at each end. Insulation and finishes to Architect's specification.
Masonry cladding to be tied to timber frame with min. 3.7 ties/m² (e.g. 600mm horizontally, 450mm vertically).

F

Plot 4 - First Floor Plan

1 : 50

1.0 GENERAL NOTES
1.01 ALL DRAWINGS TO BE READ IN CONJUNCTION WITH THE ARCHITECTS, SERVICES AND ENGINEER'S DRAWINGS AND SPECIFICATIONS.
1.02 ALL DIMENSIONS ARE IN MILLIMETRES UNLESS NOTED OTHERWISE.
1.03 ALL DIMENSIONS ON DRAWINGS SHOULD BE VERIFIED ON SITE BY THE CONTRACTOR. DO NOT SCALE FROM THESE DRAWINGS.
1.04 ALL PROPRIETARY PRODUCTS ARE TO BE USED AND INSTALLED STRICTLY IN ACCORDANCE WITH THE MANUFACTURER'S DETAILS AND REQUIREMENTS.
1.05 NO WORK APPERTAINING TO THESE DRAWINGS SHOULD BE CARRIED OUT UNTIL THE DRAWINGS AND CALCULATIONS HAVE BEEN EXAMINED BY THE APPROPRIATE LOCAL/STATUTORY AUTHORITY AND FORMAL WRITTEN APPROVAL OBTAINED. ANY WORKS CARRIED OUT BEFORE SUCH APPROVAL IS OBTAINED, EITHER FOR THE ORIGINAL APPLICATION OR REVISED INFORMATION, IS DONE AT THE CONTRACTOR'S/CLIENT'S OWN RISK. NO WORKS RELATING TO THESE DRAWINGS SHOULD BE CARRIED OUT IF 'CONDITIONAL APPROVAL SUBJECT TO CALCULATIONS' IS GRANTED BY THE LOCAL AUTHORITY.
1.06 THE STRUCTURE IS DESIGNED AND DETAILED FOR THE PERMANENT CONDITION ONLY. THE CONTRACTOR IS RESPONSIBLE FOR THE STABILITY OF THE STRUCTURE DURING ITS TEMPORARY CONDITION, ANY TEMPORARY WORKS REQUIRED DURING CONSTRUCTION, AND ANY TEMPORARY LOADS ONTO EXISTING AND NEW STRUCTURE WHICH SHALL BE LESS THAN THOSE FOR WHICH IT HAS BEEN CONFIRMED OR DESIGNED RESPECTIVELY.
1.07 THE CONTRACTOR SHALL TAKE ALL NECESSARY PRECAUTIONS TO ENSURE THAT NOISE, VIBRATION AND DUST RESULTING FROM THE WORKS ARE KEPT WITHIN REASONABLE AND AGREED LIMITS.
1.08 ALL WORKS UNDERTAKEN BY CONTRACTOR TO BE COMPLIANT WITH RELEVANT AND CURRENT BUILDING CODES, REGULATIONS AND GOOD PRACTICES.

2.0 SUBSTRUCTURE
2.01 SUBSTRUCTURE DESIGN BY OTHERS.

3.0 STEELWORK
3.01 ALL STEELWORK TO BE DESIGNED IN ACCORDANCE WITH BS EN 1993-1, UNLESS STATED OTHERWISE. ALL STEEL SHALL BE IN ACCORDANCE WITH BS EN 10025, GRADE S355 UNLESS NOTED OTHERWISE. THE WORKS ARE TO BE BUILT IN ACCORDANCE WITH BS EN 1090-2, EXECUTION CLASS 2 (EXC2).
3.02 ALL FABRICATED STRUCTURAL STEELWORK SHALL BE CE MARKED.
3.03 ALL BOLTS SHALL BE GRADE 8.8. UNLESS NOTED OTHERWISE.
3.04 ALL WELDS ARE TO BE FULL PROFILE AND CONTINUOUS UNLESS NOTED OTHERWISE.
3.05 ALL STEELWORK TO RECEIVE A SUITABLE PROTECTIVE COATING FOR C2 ENVIRONMENT CATEGORY IN ACCORDANCE WITH NHBC GUIDELINES AS A MINIMUM.
3.06 STEELWORK BELOW OR WITHIN 300mm OF GROUND LEVEL TO BE GALVANISED OR RECEIVE TWO COATS HEAVY DUTY BITUMEN (MIN. 200m TOTAL).
3.07 STEELWORK IN CONTACT WITH EXTERNAL MASONRY LEAF OR EXTERNAL STEELWORK TO BE HOT-DIP GALVANISED TO BS EN ISO 1461. MINIMUM AVERAGE COATING THICKNESS TO BE 85µm FOR STEEL ≥6mm THICK. SURFACE PREPARATION, GALVANISING PROCESS, INSPECTION, AND REPAIR SHALL COMPLY WITH ISO 1461 AND ISO 14713-2. GALVANISED STEELWORK INTENDED FOR EXTERNAL EXPOSURE SHALL BE HANDLED AND STORED TO PREVENT WET STORAGE STAINING. ANY DAMAGED AREA SHALL BE REPAIRED IN ACCORDANCE WITH ISO 1461 ANNEX C USING ZINC-RICH PAINT, ZINC SPRAY, OR THERMAL SPRAYING. GALVANISED STEELWORK TO BE T WASHED AND RECEIVE PAINT FINISHES TO ARCHITECT'S/CLIENT'S SPECIFICATION. HOT-DIP GALVANISED BOLTS, NUTS, AND WASHERS SHALL COMPLY WITH BS EN ISO 10684.

4.0 TIMBER
4.01 THE DESIGN OF STRUCTURAL TIMBER SHALL BE IN ACCORDANCE WITH BS EN 1995.
4.02 ALL NOTCHES AND HOLES MADE IN TIMBER ELEMENTS TO BE IN ACCORDANCE WITH BS EN 1995.
4.03 ALL STRUCTURAL TIMBER IS TO BE STRENGTH CLASS C24 TO BS 4978 UNLESS NOTED OTHERWISE.
4.04 TIMBER FLOOR BOARDS OR PLYWOOD SPANNING OVER JOISTS TO BE 18mm THICK UNLESS NOTED OTHERWISE. EXTERNAL GRADE PLYWOOD TO BE USED WHERE APPROPRIATE SUCH AS ON FLAT ROOF AND BALCONY BUILD UPS.
4.05 TIMBER FLOOR JOISTS TO BE DOUBLED UP UNDER: PARTITIONS, BATHS, HEAVY STORAGE UNITS, KITCHEN APPLIANCES AND AS DETAILED ELSEWHERE ON THE STRUCTURAL DRAWINGS. THE JOISTS ARE TO BE BOLTED TOGETHER IN ACCORDANCE WITH BS EN 1995.
4.06 JOIST HANGERS AND STRAPS TO BE PROVIDED IN ACCORDANCE WITH BS EN 1995 AND BUILDING REGULATIONS APPROVED DOCUMENT A. TIMBER JOISTS, FLOORS AND ROOFS TO BE SECURED TO SUPPORTING WALLS AS PER BS 8103-1.
4.07 FOR TIMBER FLOORS OVER 2.5m BUT LESS THAN 4.5m TO HAVE ONE ROW OF NOGGINS AT THE MIDSPAN. FLOORS OVER 4.5m TO HAVE TWO ROWS U.N.O. ON DRAWINGS. NOGGINS TO MATCH DEPTH OF SPANNING ELEMENTS.
4.08 ELEMENTS IN STRUCTURAL TIMBER STUD WALLS ARE TO BE FIXED WITH 3.1mm DIAMETER MACHINE DRIVEN GALVANIZED STEEL NAILS 90mm LONG (MINIMUM) AT 300mm SPACINGS UNLESS NOTED OTHERWISE. CONTRACTOR SHOULD NOTE THAT THE DEPTH OF TIMBER STUDS WITHIN THE WALL MAY NEED TO INCREASE TO SUIT ARCHITECTS INSULATION SPECIFICATION. CONNECTIONS BETWEEN TIMBER STUD WALL AND OTHER WALL TYPES TO BE VIA A TIMBER SOLE PLATE WITH 4mm DIAMETER GALVANIZED STEEL WIRE NAILS DEPTH TO ACHIEVE 37mm (MINIMUM) POINT SIDE PENETRATION.
4.09 MASONRY CLADDING TO BE TIED TO TIMBER FRAME WITH MIN. 3.7 TIES/m² (E.G. 600mm HORIZONTALLY, 450mm VERTICALLY).

5.0 MASONRY
5.01 MASONRY DESIGN BY OTHERS.
5.02 MASONRY CLADDING TO BE TIED TO TIMBER FRAME WITH MIN. 3.7 TIES/m² (E.G. 600mm HORIZONTALLY, 450mm VERTICALLY).

6.0 CONCRETE
6.01 CONCRETE DESIGN BY OTHERS.

7.0 TOLERANCES
7.01 ALL HORIZONTAL STEELWORK ELEMENTS TO VARY NO MORE THAN L/1000 OR 20mm (WHICHEVER IS LESS) BETWEEN ENDS.
7.02 ALL VERTICAL TIMBER ELEMENTS TO BE CONSTRUCTED TO WITHIN +/- 10mm POSITIONAL AND +/- 10mm VERTICALITY TOLERANCE.
7.03 ALL HORIZONTAL TIMBER ELEMENTS TO VARY NO MORE THAN L/1000 OR 20mm (WHICHEVER IS LESS) BETWEEN ENDS.
7.04 ON COMPLETION OF THE STRUCTURAL WORKS THE CONTRACTOR SHALL CARRY OUT ALL NECESSARY SURVEYS TO PROVE COMPLIANCE WITH THE ABOVE TOLERANCES.

8.0 FINISHES
8.01 ALL FINISHES, INCLUDING FIRE PROTECTION, TO ARCHITECTS SPECIFICATION.

9.0 FIRE
9.01 FIRE PROTECTION TO ARCHITECTS SPECIFICATION.
9.02 ALL STRUCTURAL STEELWORK (EXCEPT ROOF STEELWORK) REQUIRES A MINIMUM PROTECTION PERIOD OF 30 MINUTES WITH PRIOR APPROVAL FROM APPROVED INSPECTOR TO CONTRACTORS AND ARCHITECTS SPECIFICATION.

10.0 DRAINAGE
10.01 DRAINAGE DESIGN BY OTHERS.

11.0 HEALTH AND SAFETY & CDM
11.01 THE CONTRACTOR IS TO UNDERTAKE ALL NECESSARY RECORD INFORMATION SEARCHES AND/OR INVESTIGATION WORKS ON SITE (WHERE APPROPRIATE) TO CONFIRM THE LOCATION OF ALL SERVICES WITHIN AND ADJACENT TO THE SITE BOUNDARY, PRIOR TO COMMENCING CONSTRUCTION WORK ON SITE.
11.02 THE CONTRACTOR IS REMINDED OF THEIR RESPONSIBILITIES UNDER THE CONSTRUCTION DESIGN MANAGEMENT (CDM) REGULATIONS 2015 AND THEIR OBLIGATIONS UNDER OTHER APPLICABLE HEALTH & SAFETY LEGISLATION WHEN UNDERTAKING CONSTRUCTION OPERATIONS BOTH ON AND OFF SITE. THIS ALSO APPLIES TO ALL SUBCONTRACTORS AND SUPPLIERS.
11.03 SKYHOOKS ENGINEERING'S ROLE IN THIS PROJECT IS THAT OF DESIGNER AS DEFINED BY CDM REGULATIONS 2015.
11.04 SIGNIFICANT RESIDUAL RISKS HAVE BEEN IDENTIFIED ON THE CORRESPONDING PRE-CONSTRUCTION INFORMATION PROVIDED BY SKYHOOKS ENGINEERING.

12.0 SITE QUERIES & DESIGN CHANGES
12.01 CONTRACTOR TO ALLOW 5 WORKING DAYS FOR RESPONSE TO SITE QUERIES. THIS RESPONSE PERIOD IS SUBJECT TO AVAILABILITY OF RESOURCE WHICH MAY BE INCREASED AT TIMES DUE TO ANNUAL LEAVE OR DURING UNFORESEEN CIRCUMSTANCES OR DIFFICULTIES SUCH AS BUT NOT LIMITED TO ILL HEALTH.
12.02 WHERE A SITE QUERY RESULTS IN A CHANGE IN DESIGN, ADDITIONAL DESIGN FEES ARE TO BE AGREED PRIOR TO DESIGN WORK BEING UNDERTAKEN.
12.03 REQUESTS FOR DESIGN CHANGES WILL ATTRACT ADDITIONAL DESIGN FEES. ADDITIONAL DESIGN FEES ARE TO BE AGREED PRIOR TO DESIGN WORK BEING UNDERTAKEN.

Notes:
1. This drawing is to be read in conjunction with all the relevant architect, services and engineers drawings together with relevant specifications and general notes, including General Notes on drawing S-0011.
2. No work appertaining to these drawings should be carried out until the drawings and calculations have been examined by the appropriate Local/Statutory Authority and formal written approval obtained. Any works carried before such approval is obtained, either for the original Application or revised information, is done solely at the Contractors/Client's own risk. No works relating to these calculations should be carried out if 'Conditional Approval Subject to Calculations' is granted by the Local Authority.
3. Dimensions are not to be scaled from this drawing. Refer to Architect's information for setting out.
4. All non-structural elements (e.g. waterproofing, cladding, staircases, balustrades) are as per the Architect's specification.
5. All proprietary products are to be used and installed strictly in accordance with the manufacturer's requirements.
6. The structure is designed and detailed for the permanent condition only. The Contractor is responsible for all temporary works.
7. All works undertaken by the Contractor to be compliant with relevant and current building codes, regulations and good practices.
8. All steel to be Grade S355 for open sections and Grade S355H for closed sections unless noted otherwise. For corrosion protection of steelwork, refer to S-0011 General Notes unless noted otherwise. All steelwork is subject to site measure by the Contractor– do not scale from this drawing.
9. All bolts to be Grade 8.8 unless noted otherwise.
10. All timber to be Grade C24 unless noted otherwise.

Note: Architectural drawings shown grey in background are indicative only and may not be current. Refer to Architect's drawings for latest information.

Note: All steelwork is subject to site measure by Contractor prior to order. Do not scale from this drawing. Contractor to allow for minimum bearing requirements noted on drawing.

Issue	Date	
P01	26/05/26	For review & comment

skyhooks engineering

Client
Rotherside Developments Limited

Project Title
Eckington

Drawing Title
Plot 4
Timber Frame Details
Sheet 2

Scale at A1	By / Chkd / Appd
1 : 50	JF

Role: Structural

Status: For reivew & comment

Job No	Rev
26-431	P01

ID
S-0011

29/05/2026 14:18:21

Do not scale

© Skyhooks Engineering