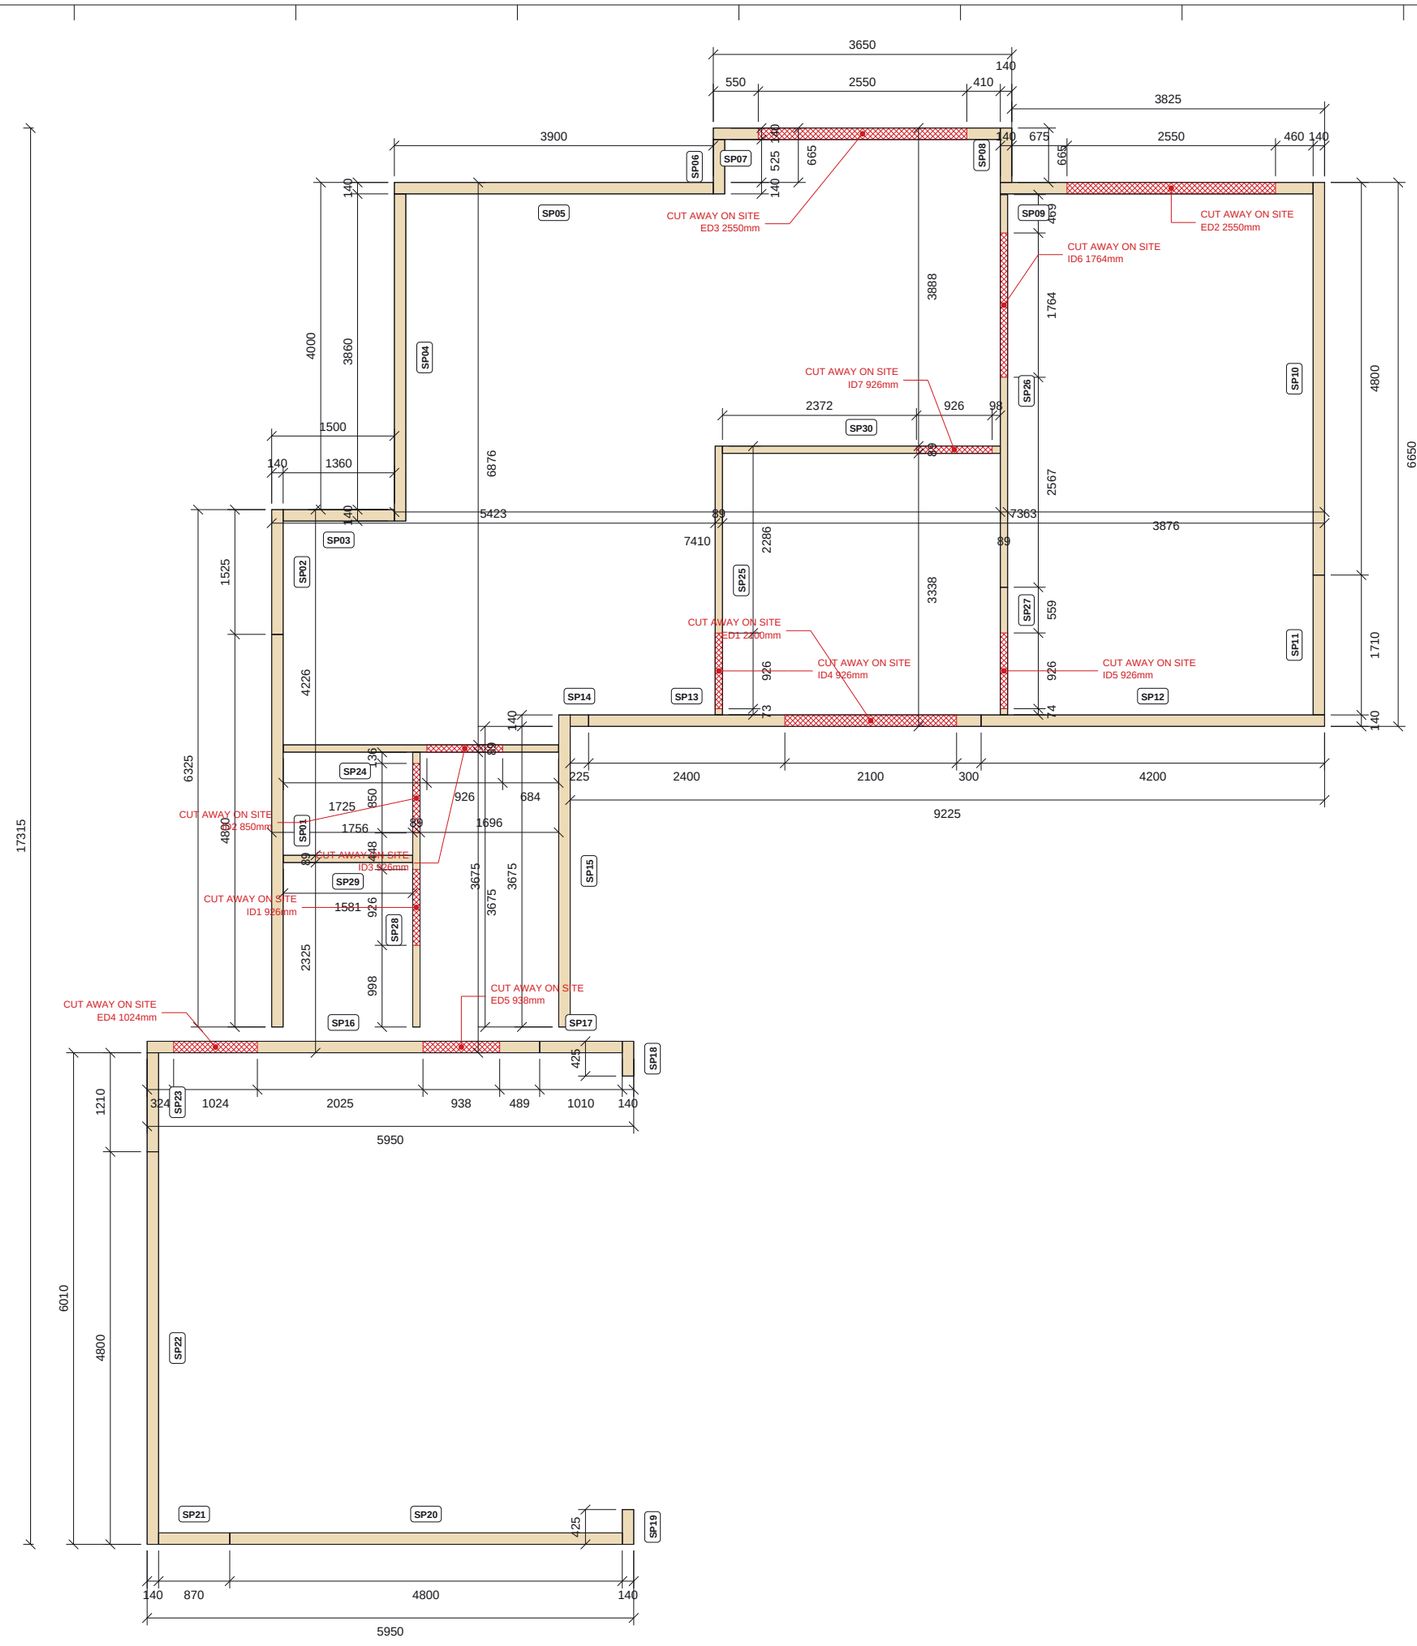


GROUND FLOOR SOLE PLATE SETTING OUT PLAN

Scale 1:75 @ A3 | Hatched red = sole plate cut away on site at door openings

SOLE PLATE SCHEDULE

SOLE PLATES

Section	Pieces	Run m	4.8m lengths
38x140 C16	23	62.1	15
38x89 C16	7	21.3	7

Cut-optimised 4.8m stock, 3mm kerf, +5%.

SOLE PLATE CUT LIST

Mark	Section	Length	Cut-away
SP01	38x140	4800	
SP10	38x140	4800	
SP13	38x140	4800	ED1
SP16	38x140	4800	ED4, ED5
SP20	38x140	4800	
SP22	38x140	4800	
SP12	38x140	4200	
SP04	38x140	4000	
SP05	38x140	3900	
SP09	38x140	3825	ED2
SP15	38x140	3815	
SP07	38x140	3510	ED3
SP11	38x140	1710	
SP02	38x140	1525	
SP03	38x140	1360	

Mark	Section	Length	Cut-away
SP23	38x140	1210	
SP17	38x140	1010	
SP21	38x140	870	
SP06	38x140	665	
SP08	38x140	665	
SP18	38x140	425	
SP19	38x140	425	
SP14	38x140	225	
SP26	38x89	4800	ID6
SP30	38x89	3396	ID7
SP24	38x89	3366	ID3
SP28	38x89	3358	ID1, ID2
SP25	38x89	3285	ID4
SP29	38x89	1581	
SP27	38x89	1559	ID5

Door cut-aways are within the piece: fix the plate, then cut the door section away. All C16.

CONSUMABLES (NOT SHOWN)

Item	Quantity	Order
600mm DPC	62.1m + 17 laps	3 x 30m roll
300mm DPC	21.3m + 12 laps	1 x 30m roll
M7.5x100 concrete screw	156 (6.5mm pilot)	2 box of 100
Silicone 15ml per hole	2.34 L	10 x 280ml

DPC laps = own width at corners/junctions, +5%. Fixings +10%.

NOTES

1. Sole plates: 38x140 C16 under external and internal load-bearing walls; 38x89 C16 under internal partitions. Outer face of sole plate = outer face of timber frame.
2. DPC under all sole plates: 600mm wide centred under external walls, 300mm wide under internal walls. Lap DPC by its own width at every corner and junction.
3. Fix sole plates with M7.5x100 concrete screws at max 600mm centres, one 50mm from each door opening (retained side) and one at each plate end at corners and junctions.
4. Pre-drill each hole with a 6.5mm bit and fill with 15ml silicone before fixing.
5. Sole plate across door openings (hatched red) is left in for erection and CUT AWAY ON SITE.
6. Check each block for square before fixing: its two diagonals (blue dashed) must be equal.
7. Dimensions are to sole plate faces. Read with P4-GA-01 and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

GROUND FLOOR SOLE PLATE SETTING OUT

DPC, fixings and silicone are scheduled - not shown


SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-SP-01	C01


Do not scale. All dimensions in mm. Check all dimensions on site.

DETAIL 1 - ETFSS HOLDING DOWN STRAP

Engineer's detail reproduced from Skyhooks 26-431-S-0010 P01 (not to scale)

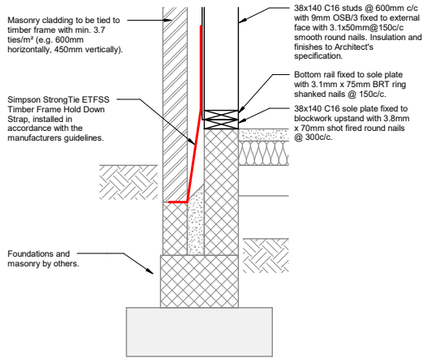

1 Plot 4 - Holding Down Strap Detail
1 : 10

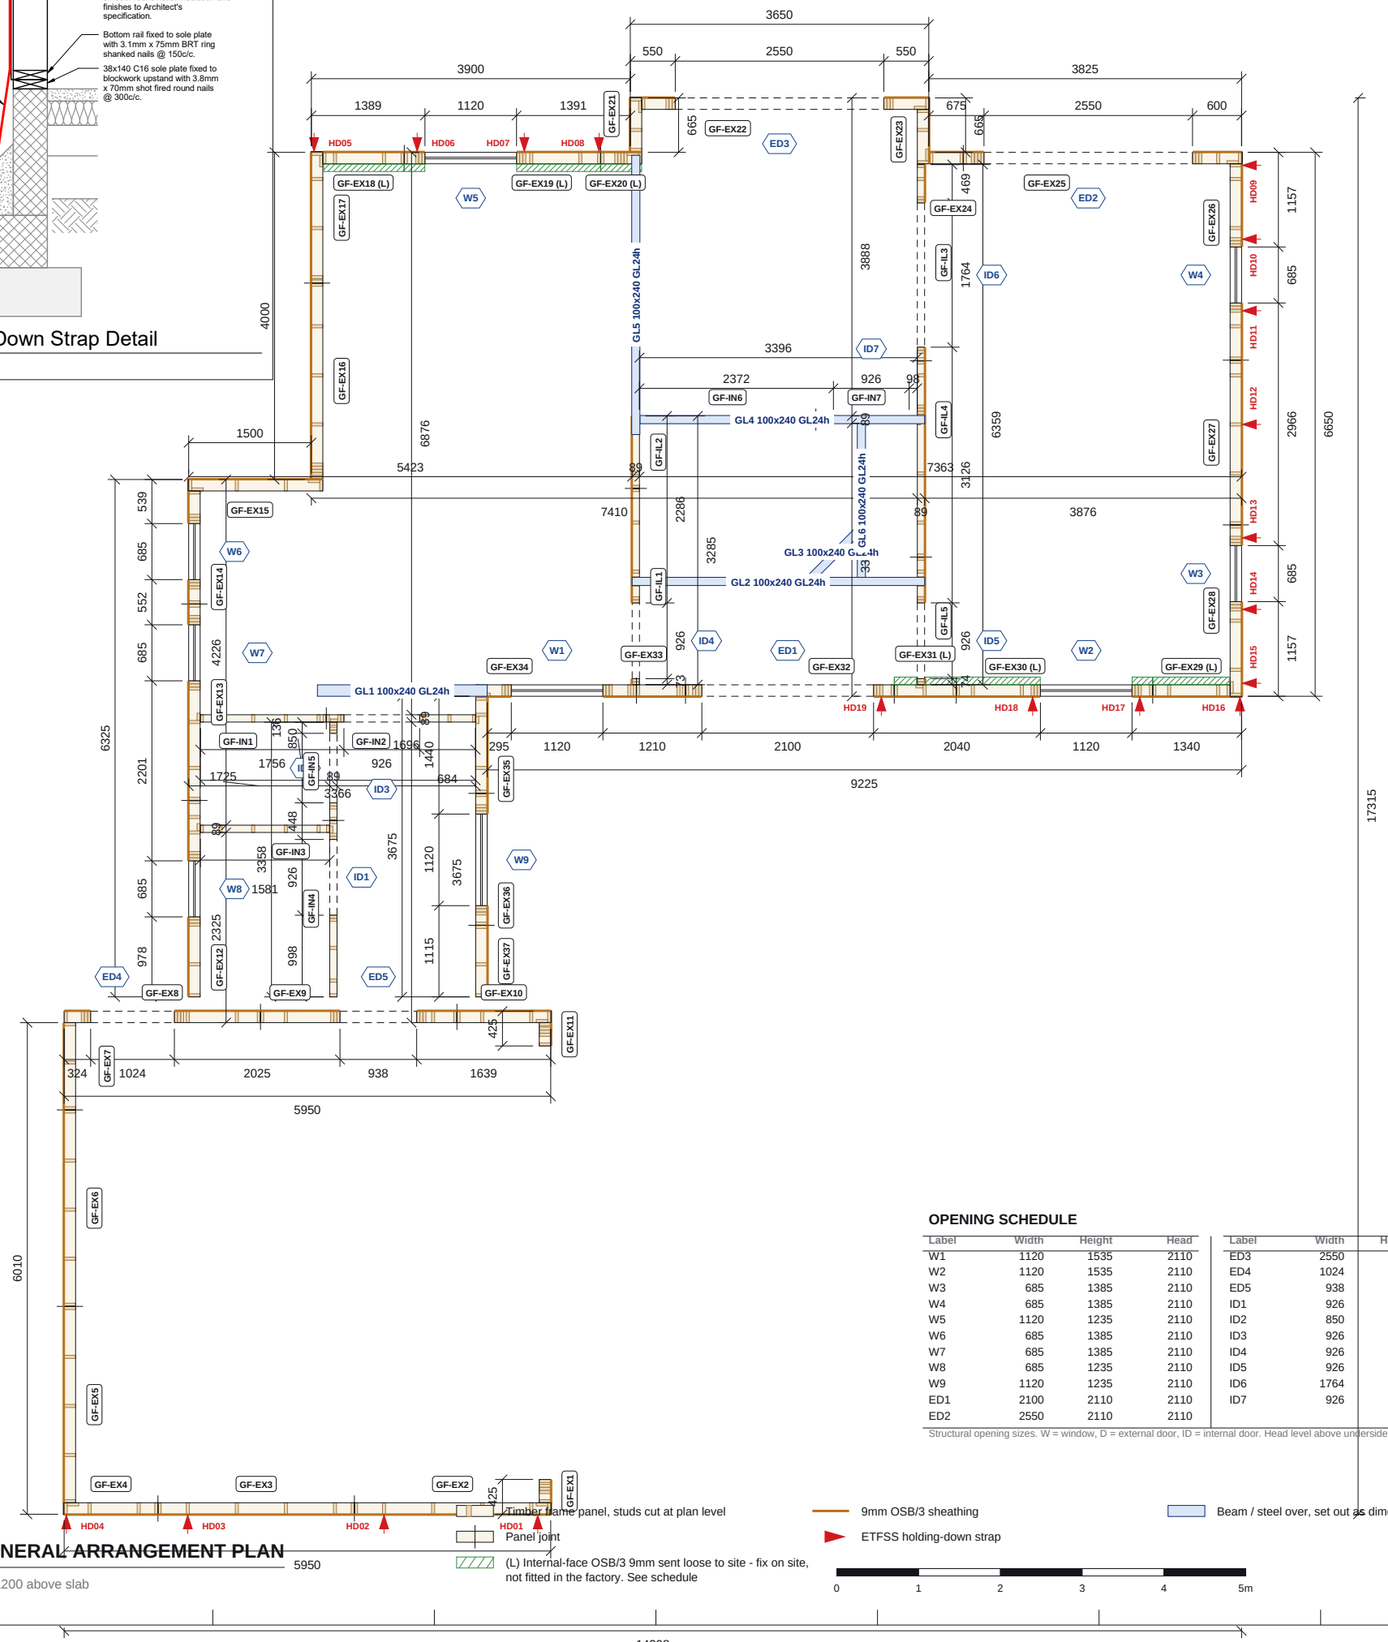

GROUND FLOOR GENERAL ARRANGEMENT PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above slab

Timber frame panel, studs cut at plan level
Panel joint
(L) Internal-face OSB/3 9mm sent loose to site - fix on site, not fitted in the factory. See schedule
9mm OSB/3 sheathing
ETFSS holding-down strap
Beam / steel over, set out as dimensioned

0 1 2 3 4 5m

OPENING SCHEDULE

Label	Width	Height	Head
W1	1120	1535	2110
W2	1120	1535	2110
W3	685	1385	2110
W4	685	1385	2110
W5	1120	1235	2110
W6	685	1385	2110
W7	685	1385	2110
W8	685	1235	2110
W9	1120	1235	2110
ED1	2100	2110	2110
ED2	2550	2110	2110

Label	Width	Height	Head
ED3	2550	2110	2110
ED4	1024	2110	2110
ED5	938	2110	2110
ID1	926	2050	2050
ID2	850	2050	2050
ID3	926	2050	2050
ID4	926	2050	2050
ID5	926	2050	2050
ID6	1764	2050	2050
ID7	926	2050	2050

Structural opening sizes. W = window, D = external door, ID = internal door. Head level above underside of sole plate.

GROUND FLOOR SCHEDULES

HEAD BINDER

Section	Pieces	Run m	4.8m lengths
38x89 C16	3	9.6	4
38x140 C16	22	62.1	15

External and load-bearing walls only. Cut-optimised 4.8m stock, 3mm kerf, +5%.

TEMPORARY BRACING (NOT SHOWN)

Item	No.	Order
Brace 4x1 treated rough-sawn, 2.7m	24	13 x 5.4m
Noggin 38x89 C16, 600	24	5 x 4.8m
M7.5x100 concrete screw (2 per noggin)	48	1 box of 100

One brace per panel joint on external / load-bearing walls (24 joints). 2 braces per 5.4m; +5%.

WINDOW BATTENS 38X43

Item	Qty	Order
Battens (head, sill, jambs)	51 / 72.5m	18 x 4.8m 38x43
Ripped from 38x89 C16 4.8m	2 per length	9 x 4.8m 38x89

External openings only. Head/sill = width + 76; jambs = height. Cut-optimised, 3mm kerf, +5%.

HOLDING-DOWN STRAPS (ETFSS)

Mark	Wall	At	On
HD01	W1/1	159	junction
HD02	W1/1	2038	stud
HD03	W1/1	4438	stud
HD04	W1/1	5923	end stud
HD05	W5/3	33	end stud
HD06	W5/3	1294	king W5
HD07	W5/3	2604	king W5
HD08	W5/3	3518	end stud
HD09	W5/8	159	end stud
HD10	W5/8	1062	king W4

Mark	Wall	At	On
HD11	W5/8	1937	king W4
HD12	W5/8	3326	stud
HD13	W5/8	4713	king W3
HD14	W5/8	5588	king W3
HD15	W5/8	6491	junction
HD16	W5/9	20	end stud
HD17	W5/9	1245	king W2
HD18	W5/9	2555	king W2
HD19	W5/9	4405	king ED1

19 No. Simpson Strong-Tie ETFSS, engineer 26-431-S-0010 Detail 1. 'At' = from the wall's start corner along the external frame face.

INTERNAL SHEATHING - SENT LOOSE

Item	Qty	Order
OSB/3 9mm 1197x2397, full sheets	15.6 m2	6 sheets
3.1x50 coil nails	488	1 x box 2,500

Ground floor: 13 site-cut pieces on 6 panels marked (L): GF-EX18, GF-EX19, GF-EX20, GF-EX29, GF-EX30, GF-EX31. Supplied loose, not on the manufacture drawings or cutting packs; fix to the panel studs on site, 3.1x50 coil nails @150 edges / 300 field. Full sheets for site cutting, +7.5%.

NOTES

1. Panels: 38x140 C16 studs at 600 centres, 9mm OSB/3 to the external face (external and load-bearing walls); 38x89 C16 partitions. Panel marks refer to the manufacture drawings.
2. Head binder 38x140 C16 over external and load-bearing walls only; joints staggered from panel joints.
3. Temporary bracing (not shown): one 2.7m 4x1 treated brace at every panel joint of external and load-bearing walls, through a 600 38x89 noggin fixed with 2 No. M7.5x100 concrete screws.
4. Window battens 38x43 to external openings: head and sill run over the jambs by 38; doors head and jambs.
5. ETFSS holding-down straps (red) on the stud scheduled, to engineer's Detail 1 and Simpson guidance.
6. Beams and steel over (dark blue) set out as dimensioned; TOS = top of steel above underside of sole plate. Dimensions to timber frame faces. Read with P4-SP-01, P4-FL-01 and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE


GROUND FLOOR GENERAL ARRANGEMENT

Panels, openings, holding-down straps, beams and steel over

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-GA-01	C01

Do not scale. All dimensions in mm. Check all dimensions on site.

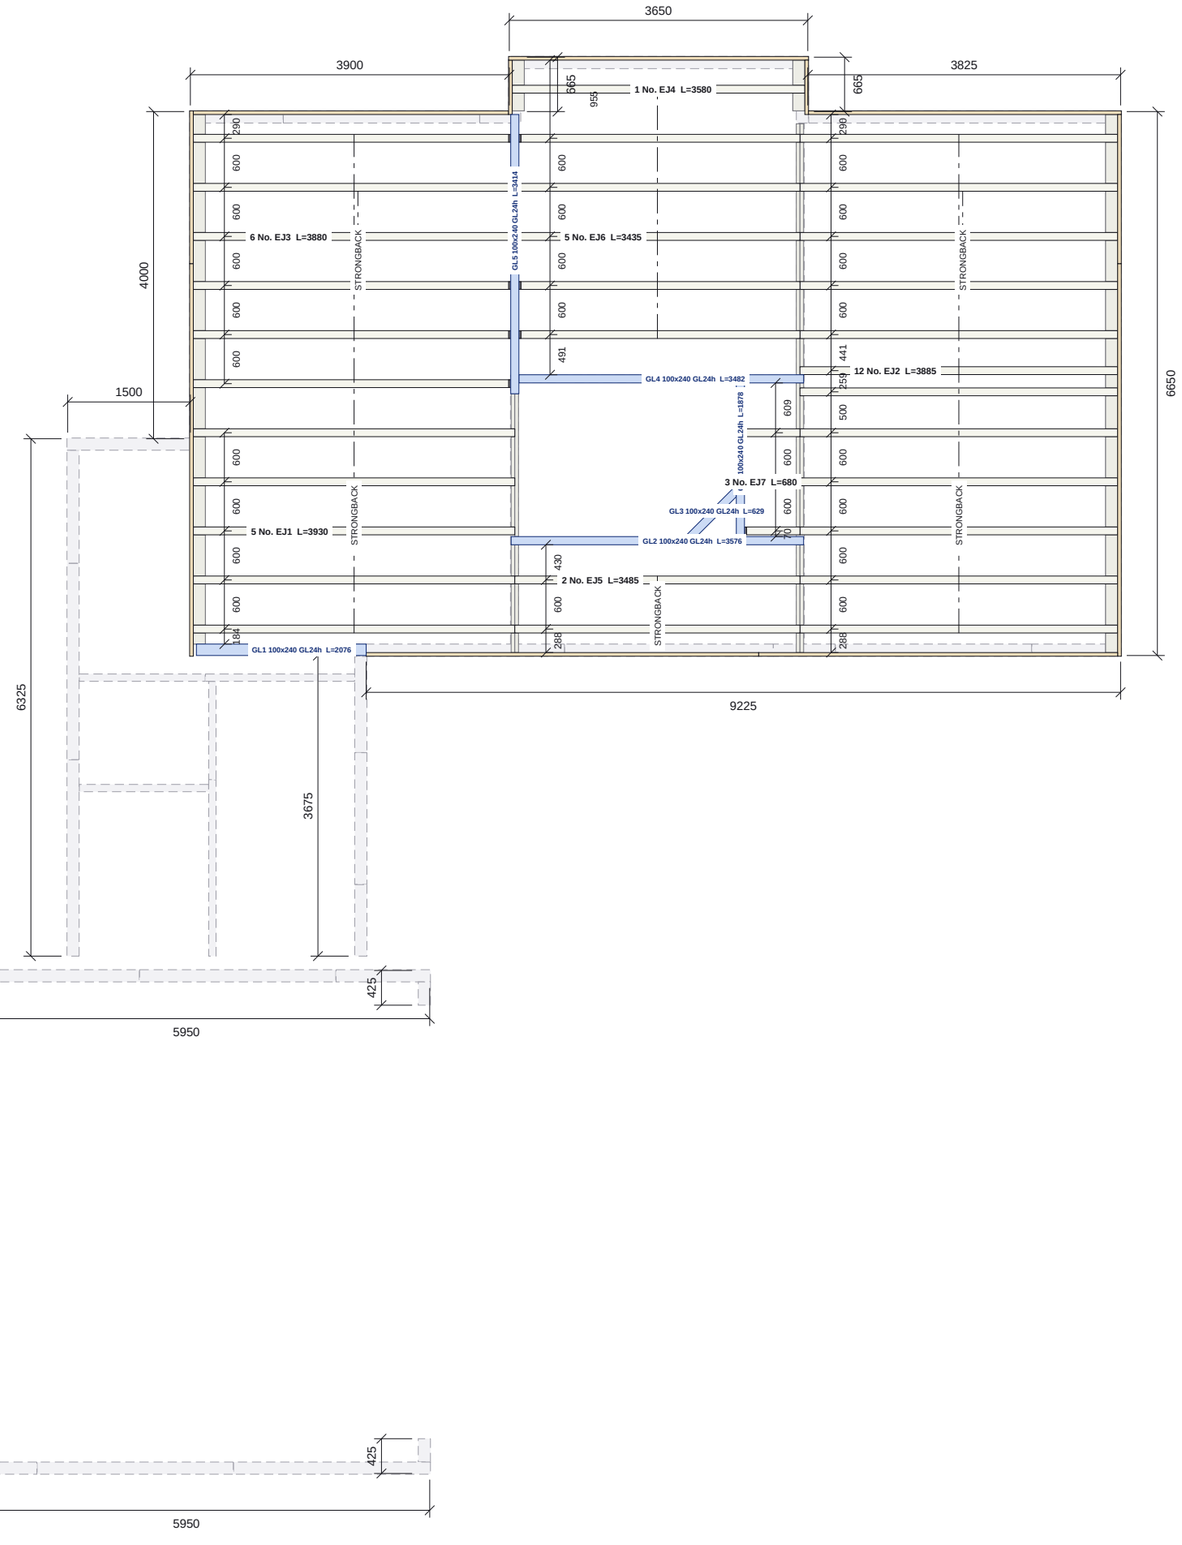

FIRST FLOOR STRUCTURE PLAN - INDICATIVE

Scale 1:75 @ A3 | Ground floor walls below shown grey dashed; joists by Acorn Timber Engineering

0 1 2 3 4 5m

FIRST FLOOR STRUCTURE SCHEDULES

BEAMS

Mark	Section	Length	No.
GL1	100x240 GL24h	2076	1
GL2	100x240 GL24h	3576	1
GL3	100x240 GL24h	629	1
GL4	100x240 GL24h	3482	1
GL5	100x240 GL24h	3414	1
GL6	100x240 GL24h	1878	1
PK	14mm marine ply packer, 100 wide	15.1m	6

PK: 14mm marine ply fixed to the top of each 240mm glulam to give the full 254mm floor depth (240 + 14 = 254, flush with the joists and edgebinder). Glulam and steel supplied by TLS; set out to faces as dimensioned; bearings to engineer. Steel TOS above underside of sole plate.

METAL-WEB JOISTS - BY ACORN

Type	Section	Length	No.
EJ1	97x254 metal web	3930	5
EJ2	97x254 metal web	3885	12
EJ3	97x254 metal web	3880	6
EJ4	97x254 metal web	3580	1
EJ5	97x254 metal web	3485	2
EJ6	97x254 metal web	3435	5
EJ7	97x254 metal web	680	3

Acorn Timber Engineering supply, with 14 hangers, 5 strongback runs and noggins. Not in TLS procurement. Indicative; Acorn's layout supersedes.

EDGEBINDER, WAIST BAND, BREATHER

Item	Quantity	Order
Edgebinder 254 (45x195 + 45x59 rip)	35.2m	9 x 4.8m 45x195
45x59 C24 rips, 3 per 45x195	35.2m	3 x 4.8m 45x195
45x195 C24 total		12 x 4.8m
OSB/3 waist band 290x9	15 strips	5 x 1197x2397
Breather 450 x 2.7m strips, 150 lap	14 strips	15 (1 roll)

Run = modelled edgebinders. Timber cut-optimised +5%; OSB +7.5%; membrane laps +5%.

FLOOR DECKING

Item	Area	Order
22mm Egger P5 600x2400	73.6 m2	55 sheets
D4 adhesive 1L (per 6.5 sheets)		9 x 1L

Laid area from the model (27 full sheets + 49 cut pieces) = 51.1 sheets, +7.5%.

NOTES

1. INDICATIVE ONLY. Metal-web joists, hangers, strongbacks and noggins are designed and supplied by Acorn Timber Engineering; this drawing is superseded by Acorn's engineered floor layout on receipt.
2. Glulam beams 100x240 GL24h (dark blue) set out to the faces dimensioned, bearing on multi-ply studs to engineer's drawing 26-431-S-0010. 14mm marine ply fixed to the top of each 240mm glulam to give the full 254mm floor depth. Steel UB254x102x28 S355 supplied by TLS.
3. Edgebinder 254mm = 45x195 C24 with a 45x59 C24 rip fixed on top (rips cut 3 per 45x195, 3mm kerf).
4. OSB/3 waist band 290x9 to the outer face of the edgebinder, strips ripped 4 per 1197x2397 sheet.
5. Breather membrane over the waist band in 450 deep x 2.7m strips, each lapped 150 over the next.
6. 22mm Egger P5 flooring glued with D4 adhesive, fixed to Acorn's specification. Dimensions to frame and beam faces.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE


FIRST FLOOR STRUCTURE - INDICATIVE

Beams, set-out and metal-web joist positions; Acorn layout supersedes

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-FL-01	C01

Do not scale. All dimensions in mm. Check all dimensions on site.

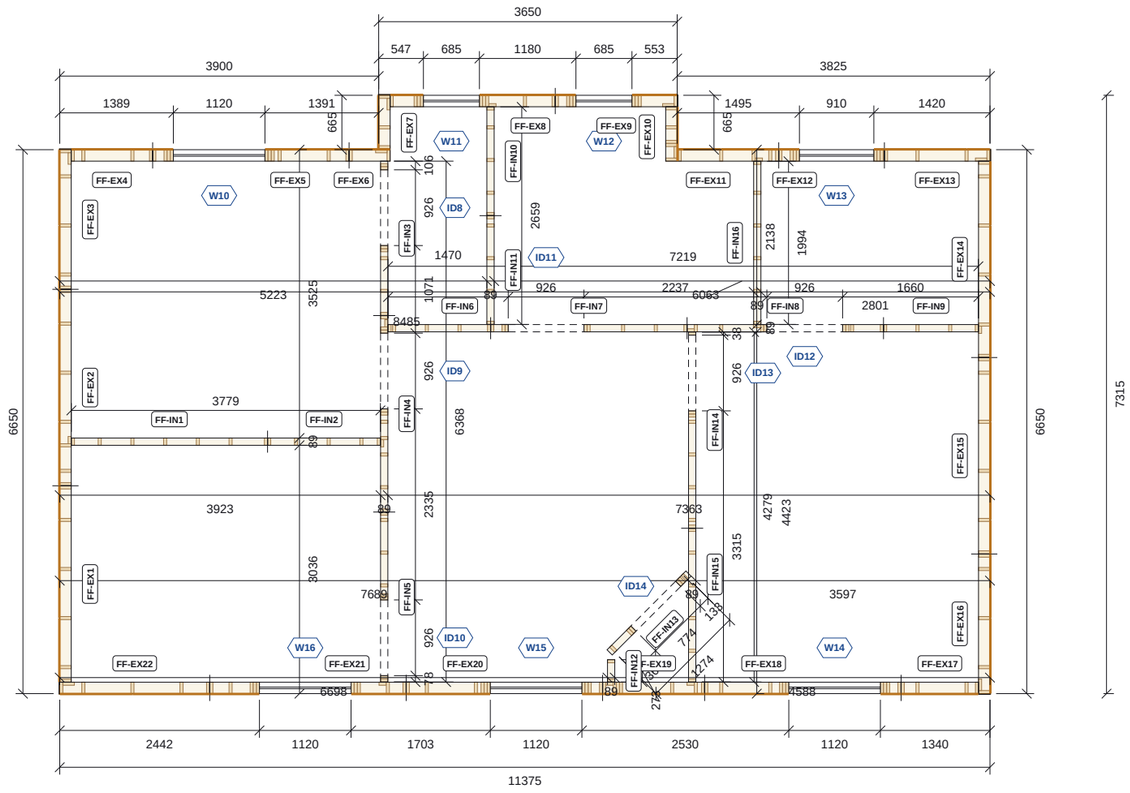

FIRST FLOOR GENERAL ARRANGEMENT PLAN

Scale 1:75 @ A3 | Plan cut at 1200 above floor deck

Timber frame panel, studs cut at plan level

Panel joint

9mm OSB/3 sheathing

Beam / steel over, set out as dimensioned

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

FIRST FLOOR SCHEDULES

HEAD BINDER

Section	Pieces	Run m	4.8m lengths
38x140 C16	12	36.8	10

External and load-bearing walls only. Cut-optimised 4.8m stock, 3mm kerf, +5%.

TEMPORARY BRACING (NOT SHOWN)

Item	No.	Order
Brace 4x1 treated rough-sawn, 2.7m	14	8 x 5.4m
Noggin 38x89 C16, 600	14	3 x 4.8m

One brace per panel joint on external / load-bearing walls (14 joints). 2 braces per 5.4m; +5%.

WINDOW BATTENS 38X43

Item	Qty	Order
Battens (head, sill, jambs)	28 / 32.1m	8 x 4.8m 38x43
Ripped from 38x89 C16 4.8m	2 per length	4 x 4.8m 38x89

External openings only. Head/sill = width + 76; jambs = height. Cut-optimised, 3mm kerf, +5%.

OPENING SCHEDULE

Label	Width	Height	Head
W10	1120	1187	2050
W11	685	1187	2050
W12	685	1187	2050
W13	910	1187	2050
W14	1120	1337	2050
W15	1120	1337	2050
W16	1120	1337	2050

Label	Width	Height	Head
ID8	926	2050	2050
ID9	926	2050	2050
ID10	926	2050	2050
ID11	926	2050	2050
ID12	926	2050	2050
ID13	926	2050	2050
ID14	774	2050	2050

Structural opening sizes. Head level above underside of panel bottom rail.

NOTES

1. Panels: 38x140 C16 studs at 600 centres, 9mm OSB/3 to the external face (external and load-bearing walls); 38x89 C16 partitions. Panel marks refer to the manufacture drawings.
2. Head binder 38x140 C16 over external and load-bearing walls only; joints staggered from panel joints.
3. Temporary bracing (not shown): one 2.7m 4x1 treated brace at every panel joint of external and load-bearing walls, through a 600 38x89 noggin nailed to the deck.
4. Window battens 38x43 to external openings: head and sill run over the jambs by 38; doors head and jambs.
5. Steel over (dark blue, TLS supply) set out as dimensioned; TOS = top of steel above top of 22mm deck. Attic trusses and cut roof members over by Acorn Timber Engineering, see P4-RF-02. Dimensions to timber frame faces. Read with P4-FL-01 and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME

Design & Manufacture

Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington


DRAWING TITLE

FIRST FLOOR GENERAL ARRANGEMENT

Panels, openings and steel over


SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-GA-02	C01

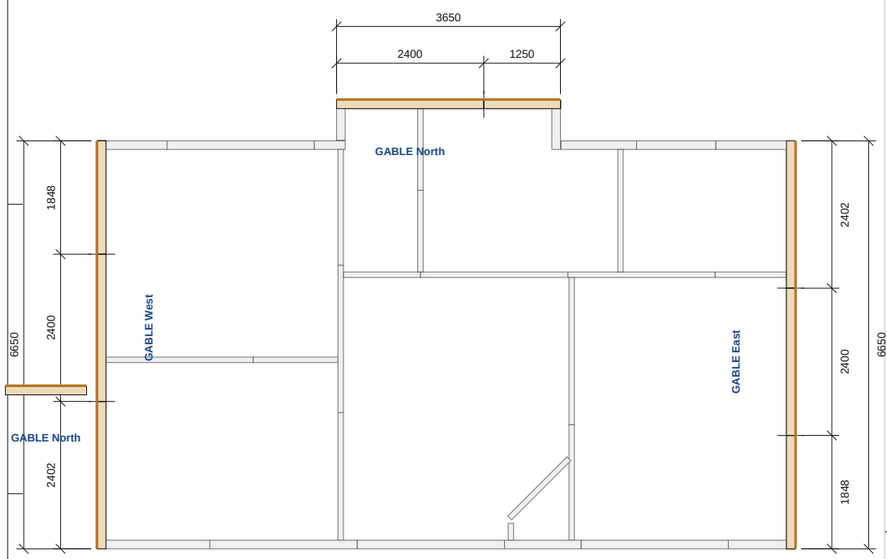

KEY PLAN - GABLES ON FIRST FLOOR WALLS

Scale 1:100 | Gable panels heavy; first floor walls below grey

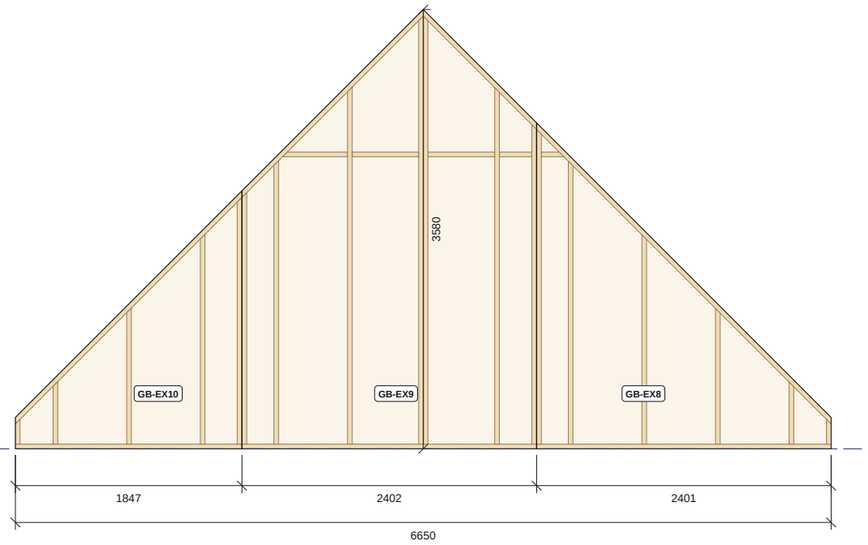


Gable base = top of first floor head binder, +5115 above slab

GABLE WEST - ELEVATION FROM OUTSIDE

Scale 1:50 | Wall 10, panels GB-EX8, GB-EX9, GB-EX10




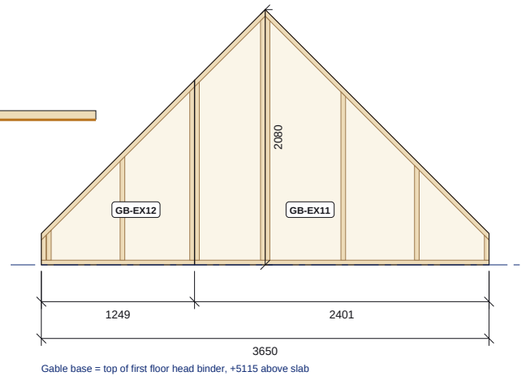

Gable base = top of first floor head binder, +5115 above slab

GABLE NORTH - ELEVATION FROM OUTSIDE

Scale 1:50 | Wall 13, panels GB-EX11, GB-EX12

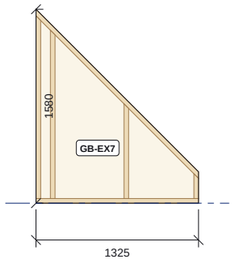

Gable base = top of first floor head binder, +2462 above slab

GABLE NORTH - ELEVATION FROM OUTSIDE

Scale 1:50 | Wall 6, panels GB-EX7

GABLE PANEL SCHEDULES

GABLE PANELS

Mark	Gable	Width	Height
GB-EX8	West	2400	2656
GB-EX9	West	2400	3580
GB-EX10	West	1846	2102
GB-EX13	East	2400	2656
GB-EX14	East	2400	3580
GB-EX15	East	1846	2102
GB-EX11	North	2400	2080
GB-EX12	North	1248	1504
GB-EX1	South	2400	2656
GB-EX2	South	2400	3230
GB-EX3	South	1146	1402
GB-EX4	South	2400	2656
GB-EX5	South	2400	3230
GB-EX6	South	1146	1402
GB-EX7	North	1325	1580

Width along the wall, height to the top of the raked rail.

TEMPORARY BRACING (NOT SHOWN)

Item	No.	Order
Brace 4x1 treated rough-sawn, 2.7m	9	6 x 5.4m
Noggin 38x89 C16, 600 (nailed)	9	3 x 4.8m

One brace per gable panel joint. +5%.

NOTES

1. Gable panels: 38x140 C16 studs, 9mm OSB/3 to the external face, raked top rails to the roof pitch. No sole plate or head binder: panels bear on the first floor head binder and truss bottom chords.
2. Set out each gable from the outer edges of its central (ridge) panel to the ends of the first floor wall below, as dimensioned on the key plan.
3. Temporary bracing (not shown): one 2.7m 4x1 treated brace at every gable panel joint, fixed through a 600 38x89 noggin nailed to the deck.
4. Window battens 38x43 to gable openings: head and sill run over the jambs by 38.
5. Opening heads are measured from the underside of the panel bottom rail. Read with P4-GA-02 and P4-RF-02.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE


GABLE PANELS GENERAL ARRANGEMENT

Key plan 1:100, gable framing elevations 1:50

SCALE	SIZE	DATE	DRAWN
1:100 / 1:50	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-GA-03	C01

Do not scale. All dimensions in mm. Check all dimensions on site.

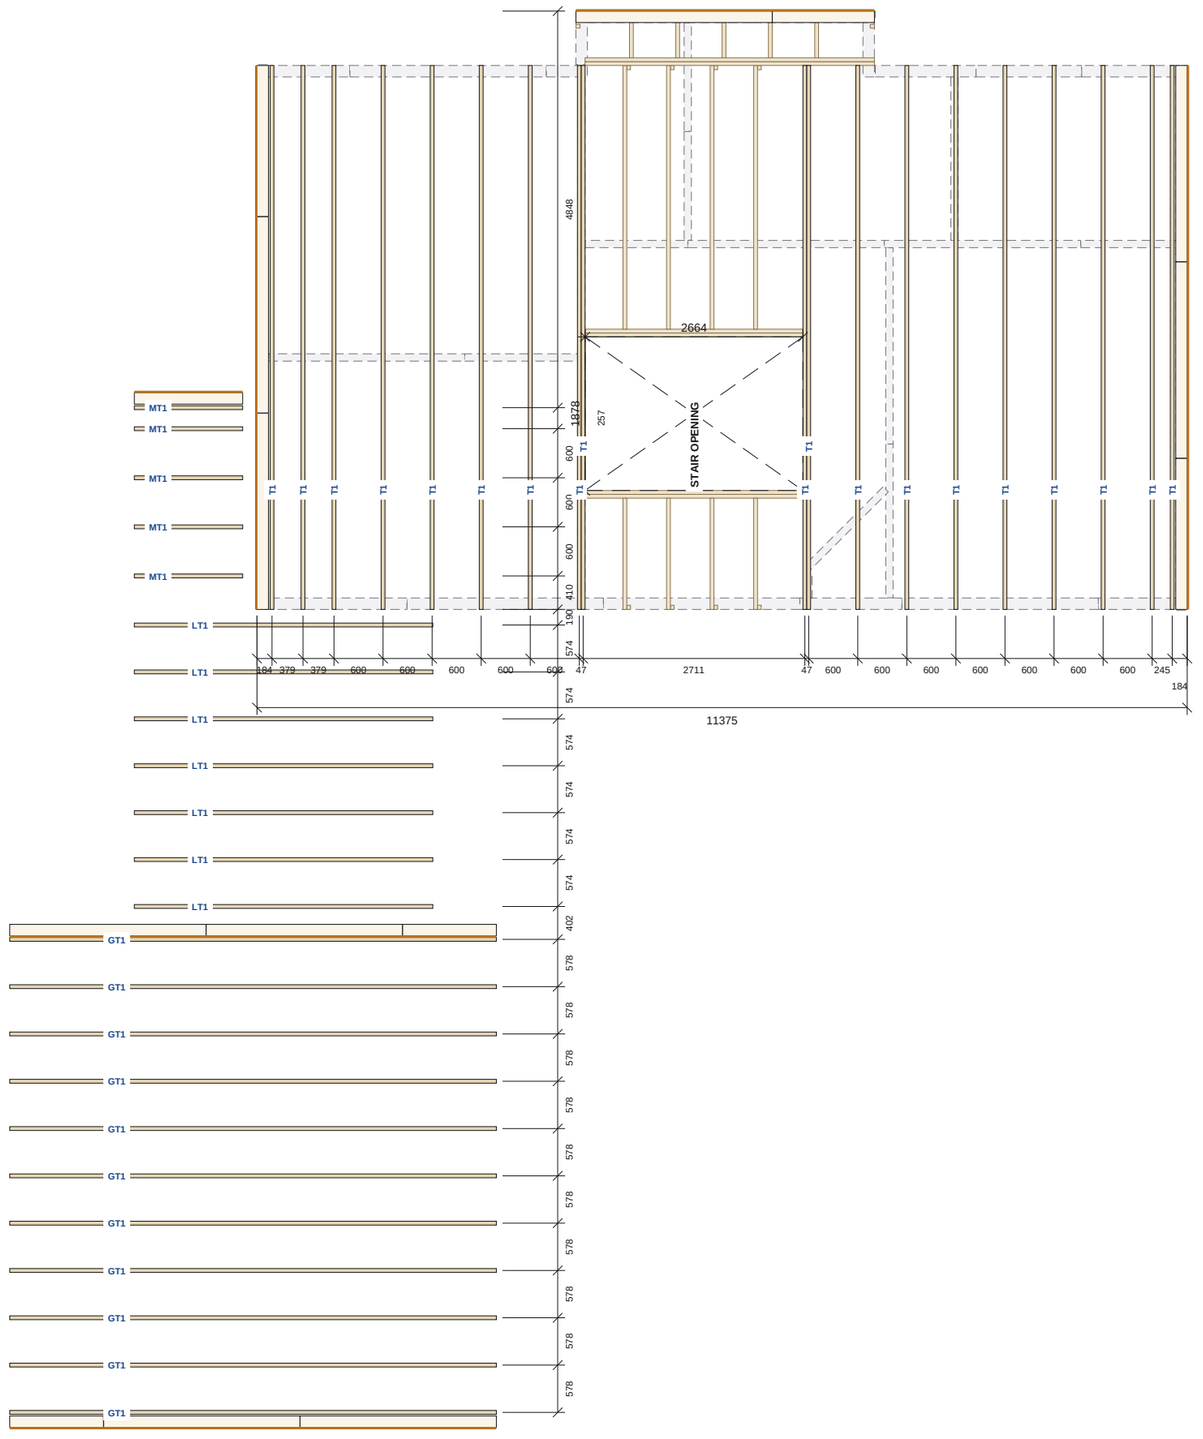

ROOF - CEILING LEVEL PLAN

Scale 1:75 @ A3 | Plan at +5415; first floor walls below grey dashed

0 1 2 3 4 5m

CEILING LEVEL SCHEDULE

ATTIC TRUSSES

Type	No.	Span	Height	Doubles
GT1	11	5950	3230	0
LT1	7	3650	2080	0
MT1	5	1325	1580	0
T1	19	6650	3588	2

Span over external frame faces; height from underside of bottom chord.

CEILING-LEVEL ROOF MEMBERS

Item	No.
Cut roof members bearing at ceiling level	29

Pop-out valley and junction framing, indicative.

NOTES

1. Ceiling level: attic truss bottom chords bear on the first floor head binder at +5115 above slab.
2. Truss bottom chords form the attic floor zone; double trusses trim the stair void and the pop-out junction.
3. Cut roof members at the pop-out valley shown at their low (ceiling-level) ends; see P4-RF-02.
4. Truss and roof member positions indicative; read with the truss manufacturer's layout and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE


ROOF - CEILING LEVEL

Attic truss bottom chords and ceiling-level roof members

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-RF-01	C01

Do not scale. All dimensions in mm. Check all dimensions on site.

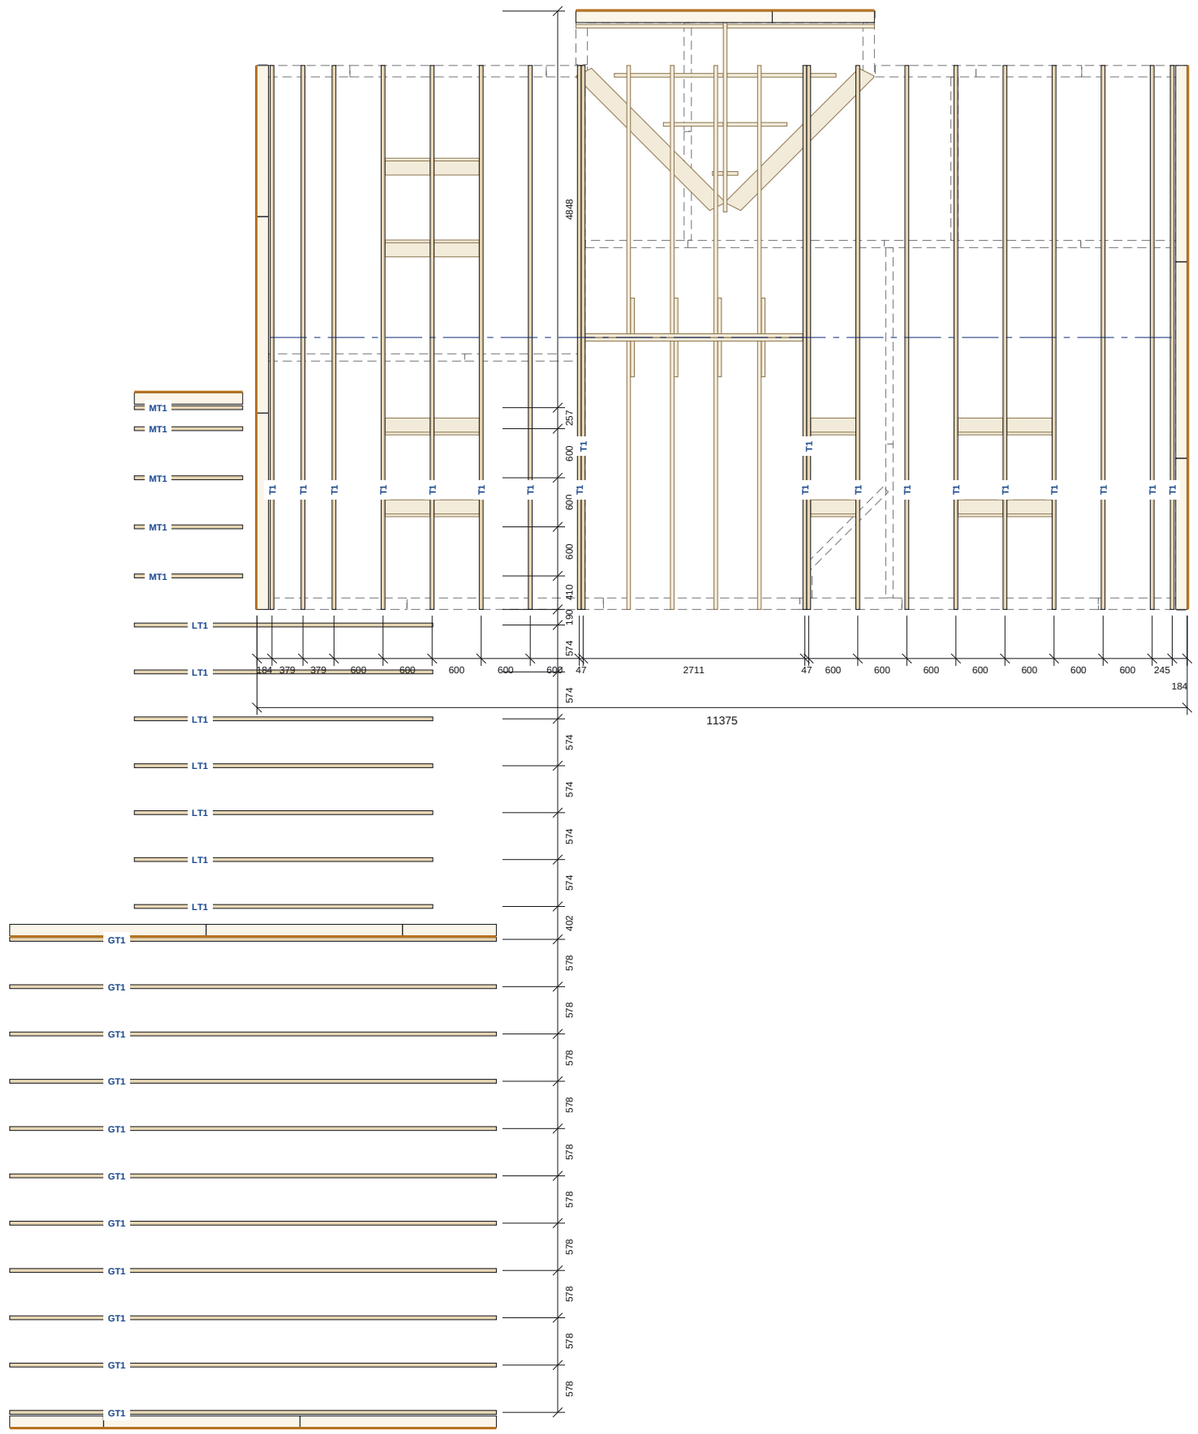

ROOF - TRUSS LAYOUT PLAN

Scale 1:75 @ A3 | Ridge lines blue dash-dot; first floor walls below grey dashed

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

ROOF SCHEDULE

ATTIC TRUSSES

Type	No.	Span	Height	Doubles
GT1	11	5950	3230	0
LT1	7	3650	2080	0
MT1	5	1325	1580	0
T1	19	6650	3588	2

Span over external frame faces; height from underside of bottom chord.

CUT ROOF MEMBERS

Item	No.
Valley / rafter / ridge / purlin members (above ceiling)	53

Indicative, at the pop-out junction.

NOTES

1. Attic trusses T1 (main roof) and T2 (pop-out roof) at the centres dimensioned; doubles where shown.
2. Cut roof members (valley, rafters, ridge and purlins) at the pop-out junction shown indicatively.
3. Gable panels see P4-GA-03. Truss and roof member positions indicative; read with the truss manufacturer's layout and engineer's drawing 26-431-S-0010.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

ROOF - TRUSS LAYOUT


Attic trusses, cut roof members and set-out

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-RF-02	C01


TRUSS T1 PROFILE (19 NO.)

Scale 1:100 | Main roof

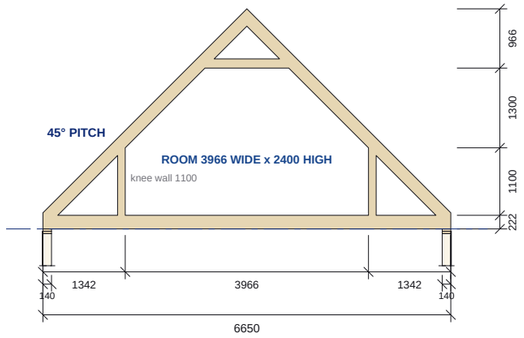


TRUSS GT1 PROFILE (11 NO.)

Scale 1:100 | Garage roof

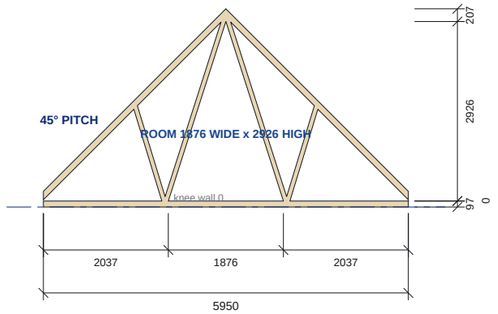


TRUSS LT1 PROFILE (7 NO.)

Scale 1:100 | Link roof

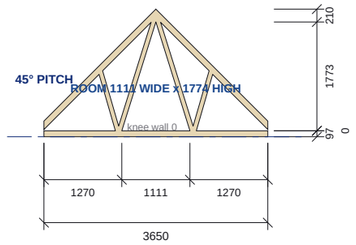

TRUSS MT1 PROFILE (5 NO.)

Scale 1:100 | Lean-to roof



TRUSS SCHEDULE

ATTIC TRUSSES

Type	No.	Span	Height	Pitch	Room
T1	19	6650	3588	45	3966 x 2400
GT1	11	5950	3230	45	1876 x 2926
LT1	7	3650	2080	45	1111 x 1774
MT1	5	1325	1580	45	617 x 1212

Span over external frame faces; height from underside of bottom chord; pitch in degrees; room = clear width x height to the collar.

NOTES

1. Attic truss profiles as modelled, for co-ordination. Member sizes, connections and bracing to the truss manufacturer's design.
2. Heights from the underside of the bottom chord (+5115 above slab, top of first floor head binder). Trusses bear on the first floor external wall head binders shown below each profile.
3. Room-in-roof clear sizes are between the inner faces of the attic studs and under the collar tie.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE


ROOF - TRUSS PROFILES

Attic truss profiles with span, height and room dimensions

SCALE	SIZE	DATE	DRAWN
1:50 / 1:100	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-RF-03	C01

Do not scale. All dimensions in mm. Check all dimensions on site.

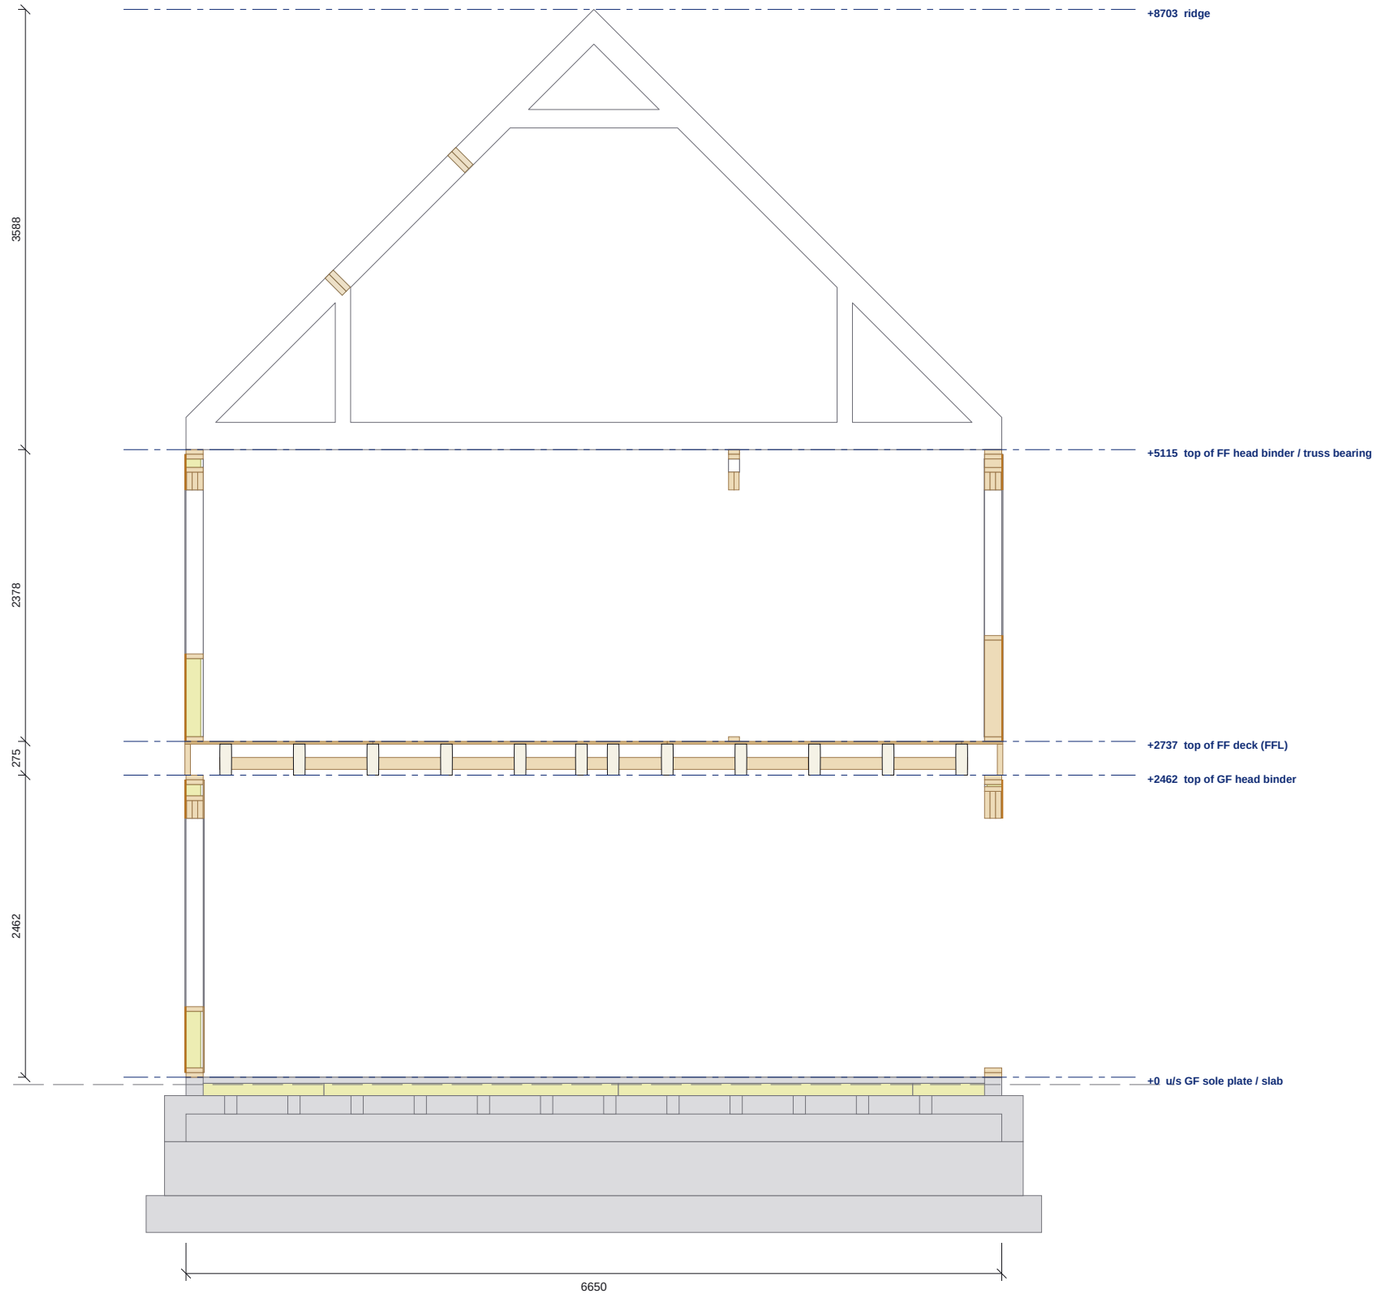

SECTION A-A

Scale 1:50 @ A3 | Main building through the lounge and master bedroom, looking west

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

SECTION A-A SCHEDULE

LEVELS

Level	mm
u/s GF sole plate / slab	+0
top of GF head binder	+2462
top of FF deck (FFL)	+2737
top of FF head binder / truss bearing	+5115
ridge	+8703

Above underside of the ground floor sole plate.

ELEMENTS CUT

Element	Pieces cut
Sole plate / head binder	7
Panel framing	47
Edgebinder	2
22mm deck	4
Metal-web joists (Acorn)	12
Cut roof members	4
Substructure (by others)	22

NOTES

1. Section A-A after architect's drawing 17.007-303, cut through the timber frame model; members up to 700mm beyond the cut shown in outline.
2. Timber frame: 38x140 C16 external walls with 9mm OSB/3 and 120mm PIR; 254 metal-web first floor (Acorn); attic trusses over.
3. Levels are above the underside of the ground floor sole plate (+0). Substructure by others, shown for reference only.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME DESIGN SUITE

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings


CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE
SECTION A-A

Main building through the lounge and master bedroom, looking west

SCALE	SIZE	DATE	DRAWN
1:50	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-SE-01	C01

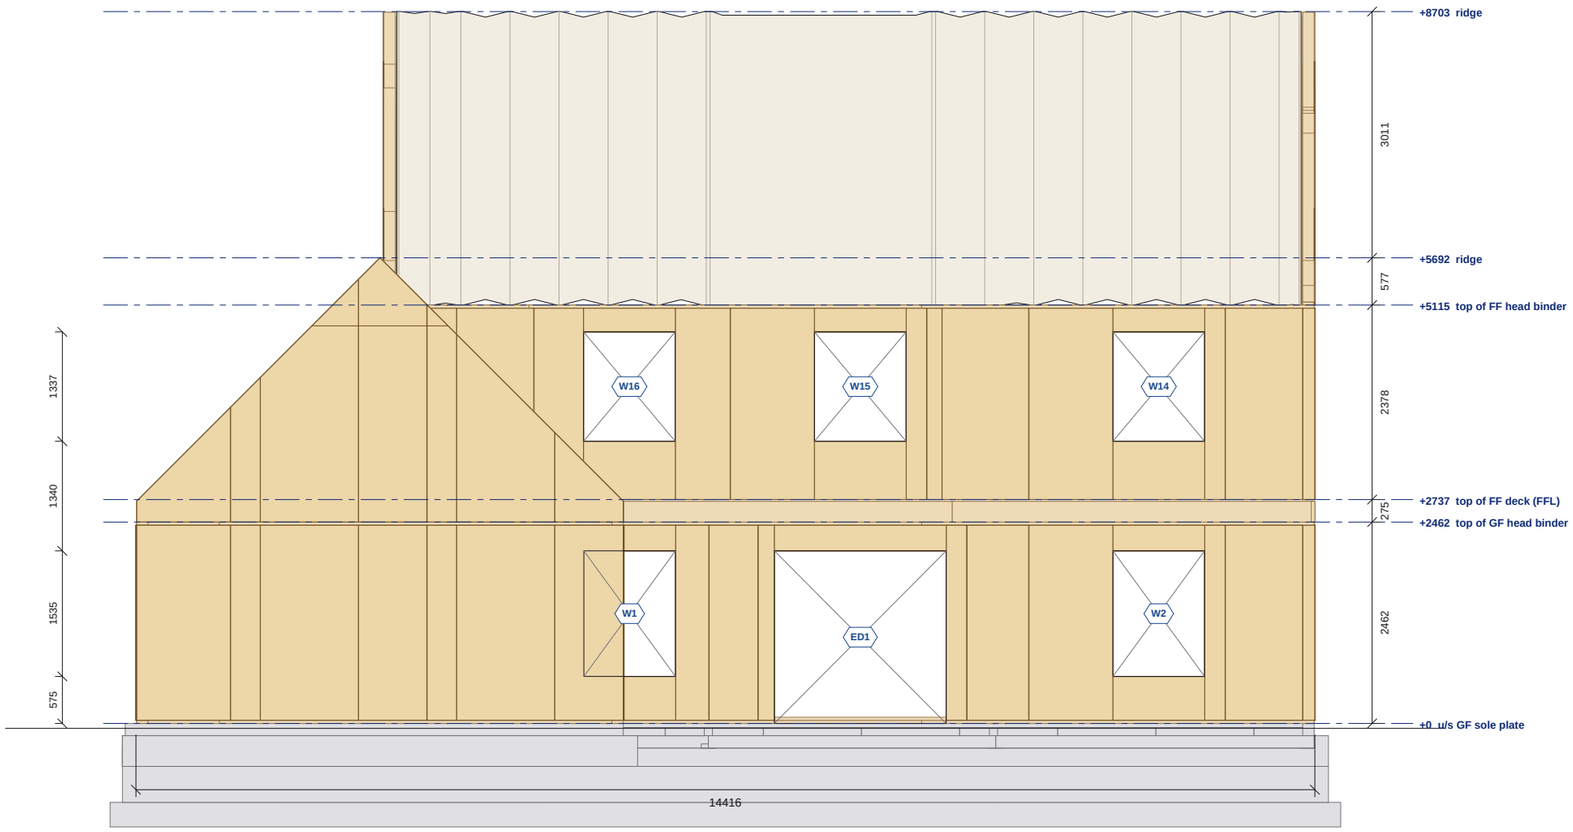

FRONT ELEVATION (SOUTH)

Scale 1:75 @ A3 | Levels right: storey levels + visible ridges; left: sills and heads on this face

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

FRONT ELEVATION (SOUTH) SCHEDULE

LEVELS ON THIS FACE

Level	mm
u/s GF sole plate	+0
top of GF head binder	+2462
top of FF deck (FFL)	+2737
top of FF head binder	+5115
ridge	+5692
ridge	+8703

Above underside of the ground floor sole plate.

OPENINGS ON THIS FACE

Label	Level	Width	Height	Sill	Head
ED1	GF	2100	2110	0	2110
W1	GF	1120	1535	575	2110
W2	GF	1120	1535	575	2110
W14	FF	1120	1337	3450	4787
W15	FF	1120	1337	3450	4787
W16	FF	1120	1337	3450	4787

Sill and head levels above underside of the GF sole plate.

NOTES

1. Construction elevation of the timber frame: OSB/3 face of external and gable panels, sole plates, head binders and edgebinders. Cladding, roof covering and windows by others, not shown.
2. Level lines shown are only those relevant to this face: storey levels, visible ridges and the sill / head levels of the openings on this face.
3. Levels above the underside of the ground floor sole plate (+0). Openings are structural openings; see P4-GA-01 / P4-GA-02 / P4-GA-03.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE
FRONT ELEVATION (SOUTH)
Timber frame construction elevation

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-EL-01	C01



SIDE ELEVATION (EAST) SCHEDULE

LEVELS ON THIS FACE

Level	mm
u/s GF sole plate	+0
top of GF head binder	+2462
top of FF deck (FFL)	+2737
ridge	+4542
top of FF head binder	+5115
ridge	+5692
ridge (gable apex)	+8696

Above underside of the ground floor sole plate.

OPENINGS ON THIS FACE

Label	Level	Width	Height	Sill	Head
W3	GF	685	1385	725	2110
W4	GF	685	1385	725	2110

Sill and head levels above underside of the GF sole plate.

NOTES

1. Construction elevation of the timber frame: OSB/3 face of external and gable panels, sole plates, head binders and edgebinders. Cladding, roof covering and windows by others, not shown.
2. Level lines shown are only those relevant to this face: storey levels, visible ridges and the sill / head levels of the openings on this face.
3. Levels above the underside of the ground floor sole plate (+0). Openings are structural openings; see P4-GA-01 / P4-GA-02 / P4-GA-03.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME

Design & Manufacture

Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE

SIDE ELEVATION (EAST)

Timber frame construction elevation

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS


STATUS	DRAWING No.	REV
CONSTRUCTION	P4-EL-02	C01

SIDE ELEVATION (EAST)

Scale 1:75 @ A3 | Levels right: storey levels + visible ridges; left: sills and heads on this face

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

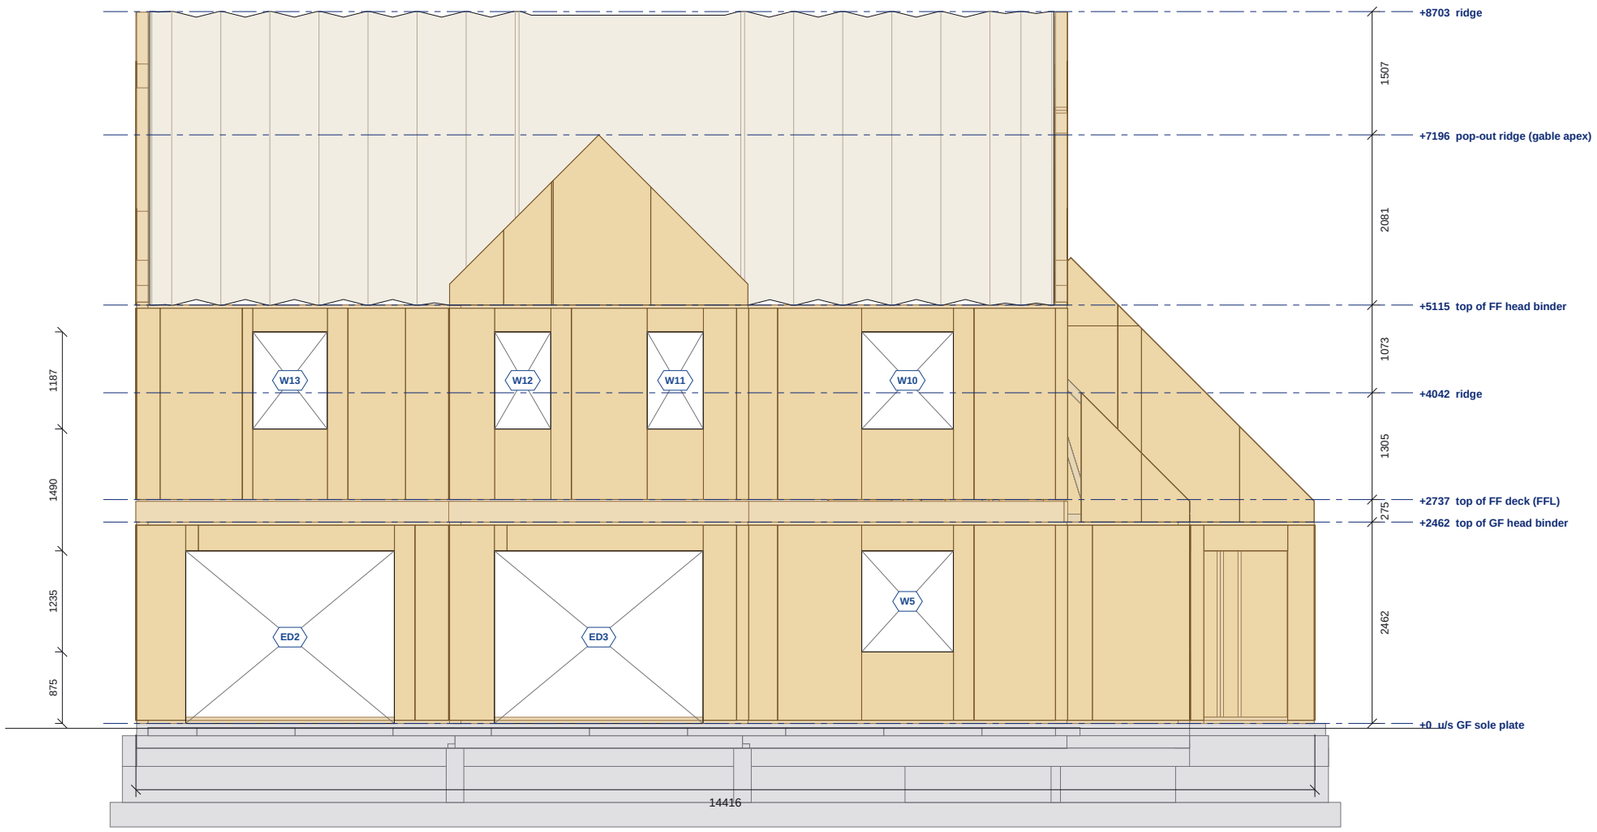

REAR ELEVATION (NORTH)

Scale 1:75 @ A3 | Levels right: storey levels + visible ridges; left: sills and heads on this face

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

REAR ELEVATION (NORTH) SCHEDULE

LEVELS ON THIS FACE

Level	mm
u/s GF sole plate	+0
top of GF head binder	+2462
top of FF deck (FFL)	+2737
ridge	+4042
top of FF head binder	+5115
pop-out ridge (gable apex)	+7196
ridge	+8703

Above underside of the ground floor sole plate.

OPENINGS ON THIS FACE

Label	Level	Width	Height	Sill	Head
ED2	GF	2550	2110	0	2110
ED3	GF	2550	2110	0	2110
W5	GF	1120	1235	875	2110
W10	FF	1120	1187	3600	4787
W11	FF	685	1187	3600	4787
W12	FF	685	1187	3600	4787
W13	FF	910	1187	3600	4787

Sill and head levels above underside of the GF sole plate.

NOTES

1. Construction elevation of the timber frame: OSB/3 face of external and gable panels, sole plates, head binders and edgebinders. Cladding, roof covering and windows by others, not shown.
2. Level lines shown are only those relevant to this face: storey levels, visible ridges and the sill / head levels of the openings on this face.
3. Levels above the underside of the ground floor sole plate (+0). Openings are structural openings; see P4-GA-01 / P4-GA-02 / P4-GA-03.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue


TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE
REAR ELEVATION (NORTH)
Timber frame construction elevation

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-EL-03	C01

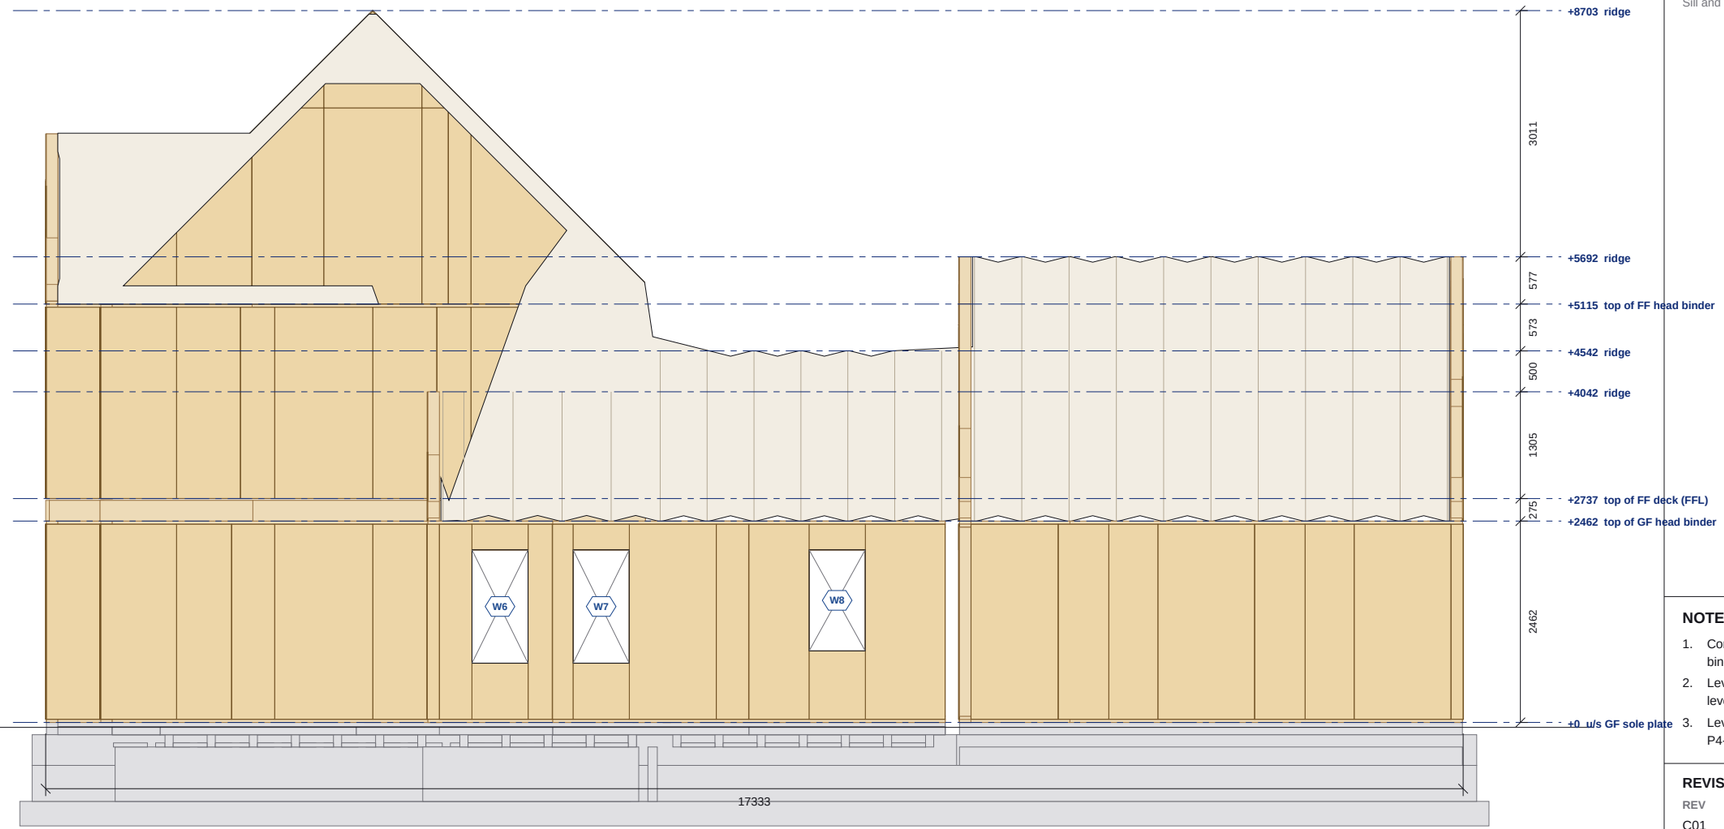

SIDE ELEVATION (WEST)

Scale 1:75 @ A3 | Levels right: storey levels + visible ridges; left: sills and heads on this face

0 1 2 3 4 5m

Do not scale. All dimensions in mm. Check all dimensions on site.

SIDE ELEVATION (WEST) SCHEDULE

LEVELS ON THIS FACE

Level	mm
u/s GF sole plate	+0
top of GF head binder	+2462
top of FF deck (FFL)	+2737
ridge	+4042
ridge	+4542
top of FF head binder	+5115
ridge	+5692
ridge	+8703

Above underside of the ground floor sole plate.

OPENINGS ON THIS FACE

Label	Level	Width	Height	Sill	Head
W6	GF	685	1385	725	2110
W7	GF	685	1385	725	2110
W8	GF	685	1235	875	2110

Sill and head levels above underside of the GF sole plate.

NOTES

1. Construction elevation of the timber frame: OSB/3 face of external and gable panels, sole plates, head binders and edgebinders. Cladding, roof covering and windows by others, not shown.
2. Level lines shown are only those relevant to this face: storey levels, visible ridges and the sill / head levels of the openings on this face.
3. Levels above the underside of the ground floor sole plate (+0). Openings are structural openings; see P4-GA-01 / P4-GA-02 / P4-GA-03.

REVISIONS

REV	DATE	DESCRIPTION
C01	14.09.26	Construction issue

TLS TIMBER FRAME
Design & Manufacture
Scan: 3D model + drawings

CLIENT	PROJECT
MP Adams	MP Adams Plot 4, Eckington

DRAWING TITLE
SIDE ELEVATION (WEST)
Timber frame construction elevation

SCALE	SIZE	DATE	DRAWN
1:75	A3	14.09.26	TS

STATUS	DRAWING No.	REV
CONSTRUCTION	P4-EL-04	C01